

# openCRX QuickStart

Version 1.10.0



[www.opencrx.org](http://www.opencrx.org)

---

## **License**

The contents of this file are subject to a BSD license (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at <http://www.opencrx.org/license.htm>

**Copyright** 2007 © CRIXP Corp. All rights reserved.



## Table of Contents

<b>1</b>	<b>About this Book.....</b>	<b>4</b>
1.1	Who this book is for.....	4
1.2	What do you need to understand this book.....	4
1.3	Tips, Warnings, etc.....	4
<b>2</b>	<b>Prerequisites.....</b>	<b>5</b>
2.1	Selection of Software Packages / Versions.....	5
2.2	Installing JDK.....	6
2.3	Installing Ant.....	6
2.4	Build the Runtime Binaries.....	6
2.5	Installing / Configuring Database.....	7
2.6	Installing / Configuring Application Server.....	7
<b>3</b>	<b>openCRX Setup and Configuration.....</b>	<b>8</b>
3.1	Overview.....	8
3.2	Verify/Create Application Server Logins.....	8
3.3	First Login / Initial Setup as admin-Root.....	9
3.3.1	Login as admin-Root.....	10
3.3.2	Create Data Segment "Standard".....	14
3.3.3	Import Codes and Data.....	16
3.3.4	Set Access Levels of Codes.....	17
3.3.5	Restarting the Application Server.....	18
3.4	Create a new User guest.....	18
3.4.1	Create a new Subject guest.....	19
3.4.2	Create a new Principal guest in realm Default.....	22
3.4.3	Make new Principal guest member of group Users.....	28
3.4.4	Segment Administrator creates new Contact.....	31
3.4.5	Segment Administrator creates new User.....	34
<b>4</b>	<b>Next Steps.....</b>	<b>36</b>

## List of Figures

Figure 1:	openCRX Login page.....	9
Figure 2:	First login with admin-Root / rootSecret.....	10
Figure 3:	Start screen of admin-Root.....	13
Figure 4:	Create a new segment named Standard.....	14
Figure 5:	Result of operation Create Administrator.....	15
Figure 6:	Load Code Tables and Data – Step 1.....	16
Figure 7:	Load Code Tables and Data – Step 2.....	16
Figure 8:	Execute Operation Set Access Level.....	17

Figure 9: Parameters of Operation Set Access Level.....	17
Figure 10: Result of the Operation Set Access Level.....	17
Figure 11: Create a new Subject.....	19
Figure 12: Change the Subject's Qualifier to guest.....	20
Figure 13: Grid Subjects with admin-Root, admin-Standard, and guest.....	21
Figure 14: Click on bread crum entry Security Realms.....	22
Figure 15: Realm Default.....	23
Figure 16: Create a new Principal.....	24
Figure 17: Select Subject guest from the drop down menu.....	25
Figure 18: Change the Principal's Qualifier to guest.....	26
Figure 19: Grid Principals with newly created Principal guest.....	27
Figure 20: Add Principal guest to Principal Group Users – Step 1.....	28
Figure 21: Add Principal guest to Principal Group Users – Step 2.....	29
Figure 22: Add Principal guest to Principal Group Users – Step 3.....	30
Figure 23: First login with admin-Standard / adminSecret.....	31
Figure 24: View > Recalculate and Refresh activates/updates charts.....	32
Figure 25: Create new Contact – Step 1.....	32
Figure 26: Create new Contact – Step 2.....	33
Figure 27: Create new User.....	34
Figure 28: Result of operation Create User.....	35

## List of Listings

Listing 1: Console Output – JBoss startup.....	7
Listing 2: File users.properties with syntax user=password.....	8
Listing 3: File roles.properties with syntax user.Roles=role1,role2,.....	8
Listing 4: Console Output – Initialization of the openCRX servlet.....	11
Listing 5: Console Output – Importing Codes and Data.....	16

# 1 About this Book

This book describes what you need to get started with openCRX and how to configure openCRX. Please note that this is a guide to set up a **runtime environment**. Information on how to set up a development environment is available in the file `/core/README`.

openCRX is the leading enterprise-class open source CRM suite. openCRX is based on openMDX, an open source MDA framework based on the OMG's model driven architecture (MDA) standards. This guarantees total openness, standards compliance, a state-of-the-art component-based architecture, and virtually unlimited scalability.

## 1.1 Who this book is for

The intended audience are openCRX administrators and advanced users.

## 1.2 What do you need to understand this book

This book describes how to install openCRX and how to configure openCRX. Even though it is possible to install openCRX without a deeper understanding of J2EE applications, application servers, and database management systems, it is still a plus if you are comfortable with these topics.

openCRX is an enterprise-class J2EE application. Installation, administration, and maintenance of such applications is somewhat more involved than running a simple *setup.exe* (or *make install*, for that matter). So please do not expect that you will manage to install openCRX in 10 minutes as even experienced administrators can easily spend an hour or more on their first install.

## 1.3 Tips, Warnings, etc.

We make use the following pictograms:



Information provided as a "Tip" might be helpful for various reasons: time savings, risk reduction, etc. - it goes without saying that we advise to follow our guides meticulously

**meticulous** \muh-TIK-yuh-luhs\, *adjective*:  
Extremely or excessively careful about details.



You should carefully read information marked with "Important". Ignoring such information is typically not a good idea.



Warnings should not be ignored (risk of data loss, etc.)

## 2 Prerequisites

Installing openCRX is a somewhat involved process as you are required to install/configure various other components as well. In a first step, however, you need to choose an appropriate selection of software packages, namely an **application server** (click here for list J2EE-compliant application servers supported by openCRX), a **database management system** (click here for list of database management systems supported by openCRX), and a **JDK**.

Before you get started with the selection process, however, it is a good idea to spend some time browsing the various pages containing information about the products and reviewing the openCRX version compatibility information provided at <http://www.opencrx.org/faq.htm#versioncompatibility>.

### 2.1 Selection of Software Packages / Versions



In the end, you will have installed several software packages and it makes sense to write down the names and version numbers of these software packages – this information might be helpful in the future in case you require support or want to file a bug report:

Required Software Packages	Information	Name	Version
openCRX CRM Suite	<a href="http://www.opencrx.org">www.opencrx.org</a>	openCRX	
openMDX MDA Platform	<a href="http://www.openmdx.org">www.openmdx.org</a>	openMDX	
Java 2 Platform Standard Edition	BEA website IBM website <a href="http://java.sun.com">java.sun.com</a>	[ ] BEA JRockit JDK [ ] IBM JDK [ ] Sun J2SE JDK ...	
Java Build Tool	<a href="http://ant.apache.org">ant.apache.org</a>	Ant	[ ] 1.6.5 [ ] 1.7.0
Application Server  see here for information about deploying openCRX on Tomcat	openCRX FAQ	[ ] Bea Weblogic [ ] IBM WebSphere [ ] JBoss ...	
Database Management System	openCRX FAQ	[ ] Oracle [ ] DB/2 [ ] MS SQL [ ] PostgreSQL [ ] MySQL ...	

## 2.2 Installing JDK

Install the JDK.



Don't forget to set **environment variables** `JAVA_HOME` and `JRE_15` (or `JRE_14`, depending on the JDK version).

## 2.3 Installing Ant

Install Ant. Ant is required to build the openCRX runtime binaries.



Don't forget to set **environment variables** `ANT_HOME` and `ANT_OPTS`.

## 2.4 Build the Runtime Binaries

Read the file `/core/README` included in the openCRX distribution. This README contains important information, including how you can **build the Runtime Binaries** from the distribution. The following is a short summary of the relevant steps:

1. Expand `opencrx-1.10.0-core.jre-1.4.zip` to any directory
2. Create directory `opt` in the expanded directory
3. Expand `openmdx-1.16.4-core.jre-1.4.zip` to `opt`
4. Expand `openmdx-1.16.4-portal.jre-1.4.zip` to `opt`
5. Expand `openmdx-1.16.4-security.jre-1.4.zip` to `opt`
6. Expand `openmdx-1.16.4-websphere.websphere-6.zip` to `opt`
7. Open shell and cd to directory `./opencrx-1.10.0/core`
8. `ant install-src`
9. `ant assemble`
10. EARs are created in directory `./opencrx-1.10.0/jre-1.4/core/deployment-unit`

## 2.5 Installing / Configuring Database

As far as the **database** is concerned, the openCRX FAQ might give you some guidance in making your choice (please note that the openCRX distribution includes all the required configuration and deployment files for **PostgreSQL, MySQL, MS SQL, IBM DB/2** and **Oracle**). Various openCRX installation guides for database management systems are available from <http://www.opencrx.org/documents.htm>.

The remainder of this document assumes that you decided for MySQL and hence – after following the **openCRX Installation Guide for MySQL** – you should have a working installation of the **MySQL** database before you continue with this guide.

## 2.6 Installing / Configuring Application Server

As far as the **application server** is concerned, your best bet is probably the one you know best as long as it is J2EE-compliant (additional information regarding the choice of an application server is available in the openCRX FAQ). The openCRX distribution includes the required configuration and deployment files for **JBoss** (which is also Open Source and free), **Sun AS, BEA Weblogic,** and **IBM WebSphere**. Installation guides are available from <http://www.opencrx.org/documents.htm>.

The remainder of this document assumes that you decided for JBoss and hence – after following the **openCRX Installation Guide for JBoss** – you should have a working installation of the JBoss application server before you continue with this guide. If you follow our application server installation guides you will also install openMDX, the leading Open Source MDA platform.

Obviously, if you ended up making different choices, you can still follow this guide. You might have to make some minor adjustments to the instructions given here and some of our screen shots might look somewhat different from what you will see on your screen.

Assuming you have JBoss up and running, the last few lines of your console output should look similar to the following ones:

### *Listing 1: Console Output – JBoss startup*

```
...
17:23:05,650 INFO [EARDeployer] Started J2EE application: file:/D:/jboss-4.0.5.GA/server/default/deploy/opencrx-core-CRX-Web.ear/
17:23:05,728 INFO [Http11AprProtocol] Starting Coyote HTTP/1.1 on http-0.0.0.0-8080
17:23:05,759 INFO [Server] JBoss (MX MicroKernel) [4.0.5.GA (build: CVSTag=Branch_4_0 date=200610162339)] Started in 32s:141ms
```

Now you are ready to continue.

## 3 openCRX Setup and Configuration

Once the database is ready and openCRX properly deploys on your application server there are still a few tasks left to set up and configure openCRX. This chapter guides you through these tasks on a step-by-step basis.

### 3.1 Overview

Let us give you a brief overview of the tasks ahead before we get started:

- ◆ Verify/Create Application Server Logins {openCRX/AppServer Admin}
- ◆ First Login / Initial Setup as admin-Root {openCRX Admin}
  - Create Data Segment "Standard" {openCRX Admin}
  - Import Codes and Data {openCRX Admin}
  - Set Access Levels of Codes {openCRX Admin}
- ◆ Create a new User guest {openCRX Admin / Segment Admin}
  - Create a new Subject guest {openCRX Admin}
  - Create a new Principal guest in realm Default {openCRX Admin}
  - Make new Principal guest member of group Users {openCRX Admin}
  - Segment Administrator creates new Contact {Segment Admin}
  - Segment Administrator creates new User {Segment Admin}

All right, let's get started.

### 3.2 Verify/Create Application Server Logins

For the following steps we assume that the openCRX administrator has configured the users *admin-Root*, *admin-Standard* and *guest* with the appropriate roles on the application server. In the case of JBoss this requires creating/editing the files **users.properties** and **roles.properties** as follows:

*Listing 2: File **users.properties** with syntax user=password*

```
admin-Root=rootSecret
admin-Standard=adminSecret
guest=guest
```

*Listing 3: File **roles.properties** with syntax user.Roles=role1,role2,...*

```
admin-Root.Roles=OpenCrxRoot
admin-Standard.Roles=OpenCrxAdministrator
guest.Roles=OpenCrxUser
```



It is strongly recommended that you stay with the file-based UsersRolesLoginModule for the user **admin-Root**. This simplifies the openCRX bootstrapping.

### 3.3 First Login / Initial Setup as admin-Root

Connect to the login page of openCRX. The exact URL depends on your deployment details. For a standard openCRX deployment to JBoss running on your local machine and listening at port 8080 the URL is

`http://localhost:8080/opencrx-core-CRX/Login`

You should see the openCRX Login page as follows:

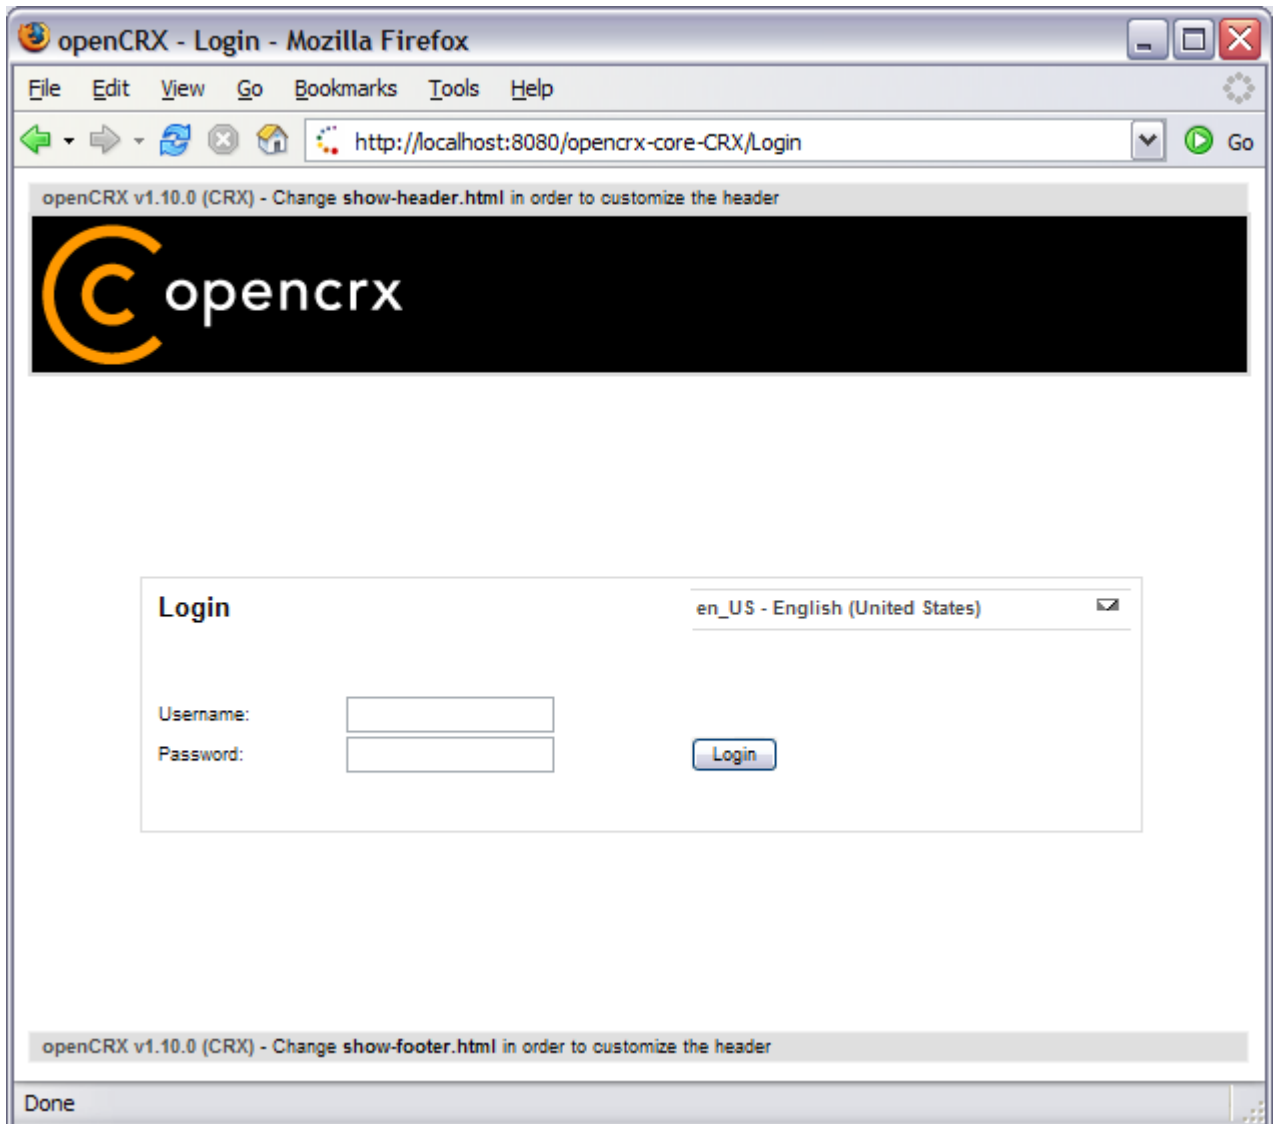


Figure 1: openCRX Login page

### 3.3.1 Login as admin-Root

Enter **admin-Root** into the field *Username* and then enter **rootSecret** into the field *Password* (you may have chosen a different password, i.e. enter the password you chose during installation/configuration of the application server):

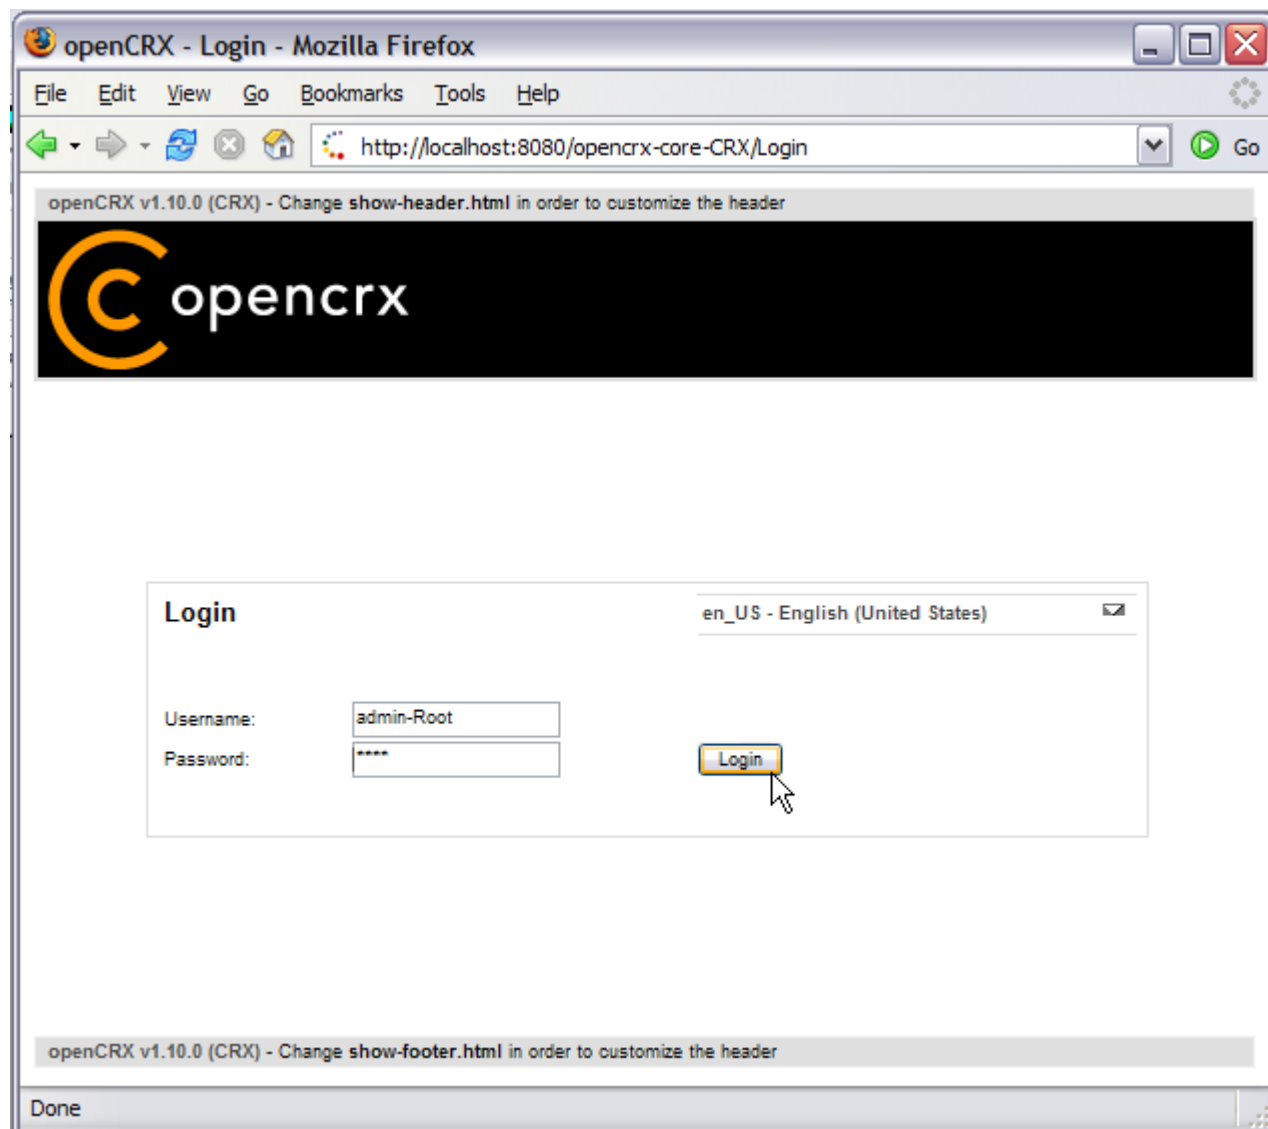


Figure 2: First login with admin-Root / rootSecret

Click the button  to start the initialization process.



If you can't get past the login screen (with the correct Username and Password, of course) and the Warning "**Browser must accept cookies**" keeps showing up need to **verify your browser settings related to cookies**. If you have installed a **personal firewall** (e.g. ZoneAlarm) you also need to verify those cookie settings. **The application server must be able to create/set a session cookie.**

The openCRX servlet is initialized during this first login, i.e. don't kill the browser if it takes a while. The application console output will look similar to the following listing:

#### Listing 4: Console Output – Initialization of the openCRX servlet

```

10:09:48,756 INFO [STDOUT] Wed Dec 13 10:09:48 CET 2006: Login: requestURL=http://localhost:8080/openocrx-core-CRX/Login.jsp; isRequestedSessionIdFromCookie=true
10:09:48,772 INFO [STDOUT] Wed Dec 13 10:09:48 CET 2006: Login: locale=null
10:09:54,788 INFO [STDOUT] Inspecting /WEB-INF/config/ui/Root/en_US
10:09:54,929 INFO [STDOUT] Inspecting /WEB-INF/config/ui/Root/de_CH
10:09:55,038 INFO [STDOUT] Inspecting /WEB-INF/config/ui/Root/es_MX
10:09:55,163 INFO [STDOUT] Inspecting /WEB-INF/config/ui/Root/zh_CN
10:09:55,257 INFO [STDOUT] Inspecting /WEB-INF/config/ui/Root/sv_SE
10:09:55,351 INFO [STDOUT] Inspecting /WEB-INF/config/ui/Root/tr_TR
10:09:55,460 INFO [STDOUT] Inspecting /WEB-INF/config/ui/Root/fa_IR
10:09:55,523 INFO [STDOUT] Inspecting /WEB-INF/config/ui/Root/fr_FR
10:09:55,695 INFO [STDOUT] Inspecting /WEB-INF/config/ui/Root/it_IT
10:09:55,804 INFO [STDOUT] Inspecting /WEB-INF/config/ui/Root/ru_RU
10:09:55,913 INFO [STDOUT] Inspecting /WEB-INF/config/ui/Root/pl_PL
10:09:56,023 INFO [STDOUT] Inspecting /WEB-INF/config/ui/Root/pt_BR
10:09:56,148 INFO [STDOUT] Inspecting /WEB-INF/config/ui/Root/cs_CZ
10:09:56,257 INFO [STDOUT] Loading 68 ui files for locale en_US
10:09:56,632 INFO [STDOUT] Loading 67 ui files for locale de_CH
10:09:57,289 INFO [STDOUT] Loading 67 ui files for locale es_MX
10:09:57,711 INFO [STDOUT] Loading 67 ui files for locale zh_CN
10:09:58,117 INFO [STDOUT] Loading 67 ui files for locale sv_SE
10:09:58,508 INFO [STDOUT] Loading 67 ui files for locale tr_TR
10:09:59,164 INFO [STDOUT] Loading 67 ui files for locale fa_IR
10:09:59,523 INFO [STDOUT] Loading 67 ui files for locale fr_FR
10:09:59,914 INFO [STDOUT] Loading 67 ui files for locale it_IT
10:10:00,305 INFO [STDOUT] Loading 0 ui files for locale null
10:10:00,305 INFO [STDOUT] Loading 0 ui files for locale null
10:10:00,305 INFO [STDOUT] Loading 67 ui files for locale ru_RU
10:10:00,727 INFO [STDOUT] Loading 67 ui files for locale pl_PL
10:10:01,117 INFO [STDOUT] Loading 0 ui files for locale null
10:10:01,117 INFO [STDOUT] Loading 67 ui files for locale pt_BR
10:10:01,539 INFO [STDOUT] Loading 67 ui files for locale cs_CZ
10:10:06,118 INFO [STDOUT] Storing 2708 ui elements
10:10:07,290 INFO [STDOUT] Loading texts
10:10:07,306 INFO [STDOUT] Loading /WEB-INF/config/texts/en_US/texts.properties
10:10:07,306 INFO [STDOUT] Loading /WEB-INF/config/texts/en_US/openocrx.texts.properties
10:10:07,306 INFO [STDOUT] Loading /WEB-INF/config/texts/de_CH/openocrx.texts.properties
10:10:07,306 INFO [STDOUT] Loading /WEB-INF/config/texts/de_CH/texts.properties
10:10:07,306 INFO [STDOUT] Loading /WEB-INF/config/texts/es_MX/openocrx.texts.properties
10:10:07,306 INFO [STDOUT] Loading /WEB-INF/config/texts/es_MX/texts.properties
10:10:07,306 INFO [STDOUT] Loading /WEB-INF/config/texts/zh_CN/openocrx.texts.properties
10:10:07,306 INFO [STDOUT] Loading /WEB-INF/config/texts/zh_CN/texts.properties
10:10:07,306 INFO [STDOUT] Loading /WEB-INF/config/texts/sv_SE/openocrx.texts.properties
10:10:07,306 INFO [STDOUT] Loading /WEB-INF/config/texts/sv_SE/texts.properties
10:10:07,306 INFO [STDOUT] Loading /WEB-INF/config/texts/tr_TR/openocrx.texts.properties
10:10:07,321 INFO [STDOUT] Loading /WEB-INF/config/texts/tr_TR/texts.properties
10:10:07,321 INFO [STDOUT] Loading /WEB-INF/config/texts/fa_IR/openocrx.texts.properties
10:10:07,321 INFO [STDOUT] Loading /WEB-INF/config/texts/fa_IR/texts.properties
10:10:07,321 INFO [STDOUT] Loading /WEB-INF/config/texts/fr_FR/openocrx.texts.properties
10:10:07,321 INFO [STDOUT] Loading /WEB-INF/config/texts/fr_FR/texts.properties
10:10:07,321 INFO [STDOUT] Loading /WEB-INF/config/texts/it_IT/openocrx.texts.properties
10:10:07,321 INFO [STDOUT] Loading /WEB-INF/config/texts/it_IT/texts.properties
10:10:07,321 INFO [STDOUT] Loading /WEB-INF/config/texts/ru_RU/texts.properties
10:10:07,321 INFO [STDOUT] Loading /WEB-INF/config/texts/ru_RU/openocrx.texts.properties
10:10:07,321 INFO [STDOUT] Loading /WEB-INF/config/texts/pl_PL/openocrx.texts.properties
10:10:07,337 INFO [STDOUT] Loading /WEB-INF/config/texts/pl_PL/texts.properties
10:10:07,337 INFO [STDOUT] Loading /WEB-INF/config/texts/pt_BR/openocrx.texts.properties
10:10:07,337 INFO [STDOUT] Loading /WEB-INF/config/texts/pt_BR/texts.properties
10:10:07,337 INFO [STDOUT] Loading /WEB-INF/config/texts/cs_CZ/openocrx.texts.properties
10:10:07,337 INFO [STDOUT] Loading /WEB-INF/config/texts/cs_CZ/texts.properties
10:10:07,352 INFO [STDOUT] Loading layouts
10:10:07,352 INFO [STDOUT] Loading /WEB-INF/config/layout/en_US/show-Default.jsp
10:10:07,352 INFO [STDOUT] Loading /WEB-INF/config/layout/en_US/edit-Default.jsp
10:10:07,352 INFO [STDOUT] Loading /WEB-INF/config/report/en_US/org.openocrx.kernel.account1.Segment-Contacts.jsp
//...//
10:10:07,946 INFO [STDOUT] Loading data
10:10:07,946 INFO [STDOUT] Loading /WEB-INF/config/bootstrap/Root/100_security_policy.xml
10:10:07,962 INFO [STDOUT] Storing 5 objects
10:10:10,400 INFO [STDOUT] Creating org::openmdx::security::authorization1/provider/CRX/segment/Root
10:10:10,431 INFO [STDOUT] Creating
org::openmdx::security::authorization1/provider/CRX/segment/Root/policy/Default
10:10:10,447 INFO [STDOUT] Creating

```

```

    org::openmdx::security::authorization1/provider/CRX/segment/Root/policy/Default/role/OpenCrxAdministrator
10:10:10,462 INFO [STDOUT] Creating
    org::openmdx::security::authorization1/provider/CRX/segment/Root/policy/Default/role/OpenCrxUser
10:10:10,478 INFO [STDOUT] Creating
    org::openmdx::security::authorization1/provider/CRX/segment/Root/policy/Default/role/OpenCrxRoot
10:10:10,478 INFO [STDOUT] Loading /WEB-INF/config/bootstrap/Root/101_security_subjects.xml
10:10:12,119 INFO [STDOUT] Storing 2 objects
10:10:12,119 INFO [STDOUT] Creating org::opencrx::security::identity1/provider/CRX/segment/Root
10:10:12,134 INFO [STDOUT] Creating
    org::opencrx::security::identity1/provider/CRX/segment/Root/subject/admin-Root
10:10:12,134 INFO [STDOUT] Loading /WEB-INF/config/bootstrap/Root/102_security_realms.xml
10:10:12,150 INFO [STDOUT] Storing 10 objects
10:10:12,166 INFO [STDOUT] Creating org::openmdx::security::realm1/provider/CRX/segment/Root
10:10:12,166 INFO [STDOUT] Creating org::openmdx::security::realm1/provider/CRX/segment/Root/realm/Default
10:10:12,181 INFO [STDOUT] Creating
    org::openmdx::security::realm1/provider/CRX/segment/Root/realm/Default/principal/admin-Root
10:10:12,244 INFO [STDOUT] Creating
    org::openmdx::security::realm1/provider/CRX/segment/Root/realm/Default/principal/Administrators
10:10:12,259 INFO [STDOUT] Creating
    org::openmdx::security::realm1/provider/CRX/segment/Root/realm/Default/principal/Users
10:10:12,275 INFO [STDOUT] Creating org::openmdx::security::realm1/provider/CRX/segment/Root/realm/Root
10:10:12,291 INFO [STDOUT] Creating
    org::openmdx::security::realm1/provider/CRX/segment/Root/realm/Root/principal/Administrators
10:10:12,306 INFO [STDOUT] Creating
    org::openmdx::security::realm1/provider/CRX/segment/Root/realm/Root/principal/Users
10:10:12,322 INFO [STDOUT] Creating
    org::openmdx::security::realm1/provider/CRX/segment/Root/realm/Root/principal/admin-Root.User
10:10:12,416 INFO [STDOUT] Creating
    org::openmdx::security::realm1/provider/CRX/segment/Root/realm/Root/principal/admin-Root
10:10:12,431 INFO [STDOUT] Loading /WEB-INF/config/bootstrap/Root/200_code_segment.xml
10:10:13,885 INFO [STDOUT] Storing 1 objects
10:10:15,135 INFO [STDOUT] Creating org::opencrx::kernel::code1/provider/CRX/segment/Root
10:10:15,197 INFO [STDOUT] Loading /WEB-INF/config/bootstrap/Root/300_admin_segment.xml
10:10:16,229 INFO [STDOUT] Storing 1 objects
10:10:16,244 INFO [STDOUT] Creating org::opencrx::kernel::admin1/provider/CRX/segment/Root
10:10:16,244 INFO [STDOUT] Loading /WEB-INF/config/bootstrap/Standard/dummy.xml
10:10:17,604 INFO [STDOUT] Storing 0 objects
10:10:17,604 INFO [STDOUT] Done
10:10:17,619 INFO [STDOUT] Inspecting /WEB-INF/config/filters/
10:10:17,635 INFO [STDOUT] Loading /WEB-INF/config/filters/
10:10:21,620 INFO [STDOUT] Loaded filters #5738
10:10:21,761 INFO [STDOUT] Inspecting /WEB-INF/config/ui/Root/en_US
10:10:21,886 INFO [STDOUT] Inspecting /WEB-INF/config/ui/Root/de_CH
10:10:21,979 INFO [STDOUT] Inspecting /WEB-INF/config/ui/Root/es_MX
10:10:22,089 INFO [STDOUT] Inspecting /WEB-INF/config/ui/Root/zh_CN
10:10:22,167 INFO [STDOUT] Inspecting /WEB-INF/config/ui/Root/sv_SE
10:10:22,276 INFO [STDOUT] Inspecting /WEB-INF/config/ui/Root/tr_TR
10:10:22,354 INFO [STDOUT] Inspecting /WEB-INF/config/ui/Root/fa_IR
10:10:22,417 INFO [STDOUT] Inspecting /WEB-INF/config/ui/Root/fr_FR
10:10:22,526 INFO [STDOUT] Inspecting /WEB-INF/config/ui/Root/it_IT
10:10:22,620 INFO [STDOUT] Inspecting /WEB-INF/config/ui/Root/ru_RU
10:10:22,745 INFO [STDOUT] Inspecting /WEB-INF/config/ui/Root/pl_PL
10:10:22,839 INFO [STDOUT] Inspecting /WEB-INF/config/ui/Root/pt_BR
10:10:22,933 INFO [STDOUT] Inspecting /WEB-INF/config/ui/Root/cs_CZ
10:10:23,026 INFO [STDOUT] Inspecting /WEB-INF/config/filters

```



If you see lots of error messages on the console and/or your log files grow very fast (several hundred KB if not more) then it is quite likely that your **DB connection** is not configured correctly. Please note that there is absolutely no sense in continuing before you have fixed your DB connection. You might want to verify

- the spelling of the name of your DB (e.g. **crx-CRX** vs. **CRX\_CRX**)
- user name (e.g. **system**) and password (e.g. **manager**)
- permissions of the user, etc.

After the successful startup of the openCRX servlet you see the start screen as shown in the figure below. You should at least see the root objects Administration, Codes, Security Realm, Security Policies, and Security Subjects:

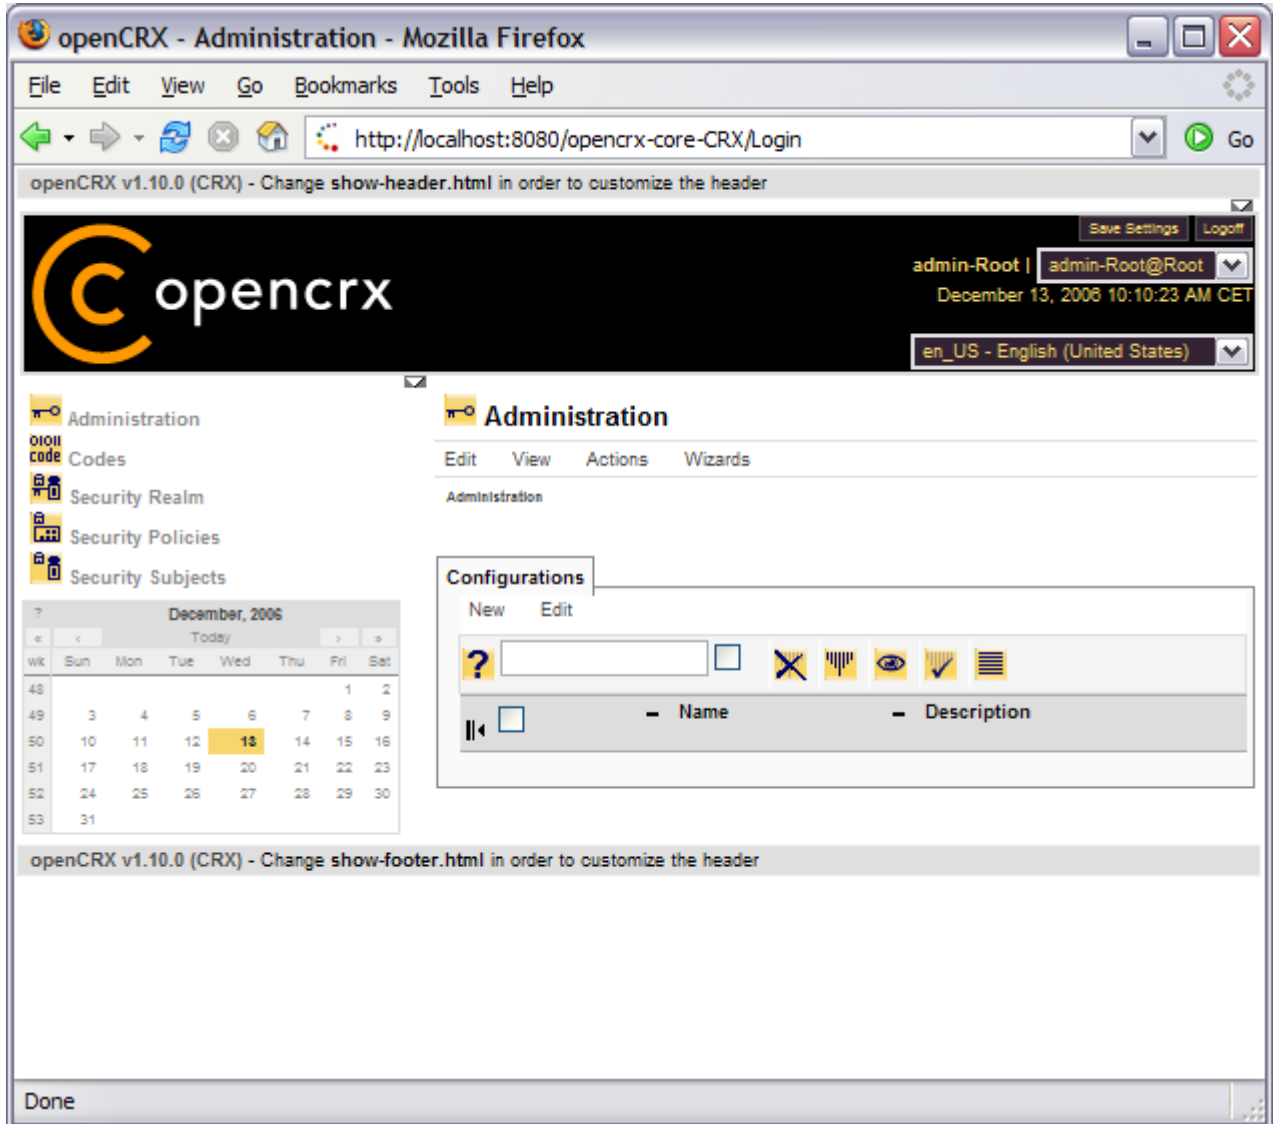


Figure 3: Start screen of admin-Root

### 3.3.2 Create Data Segment "Standard"

Execute the operation **Actions > Create Administrator** to create a new segment and selected default accounts (including an administrator's account which allows you to manage the newly created segment).

Set the field *Segment name* to **Standard**. Leave the field *Admin principal name* empty and set the fields *Initial password* and *Password again* to \* as shown in the figure below:

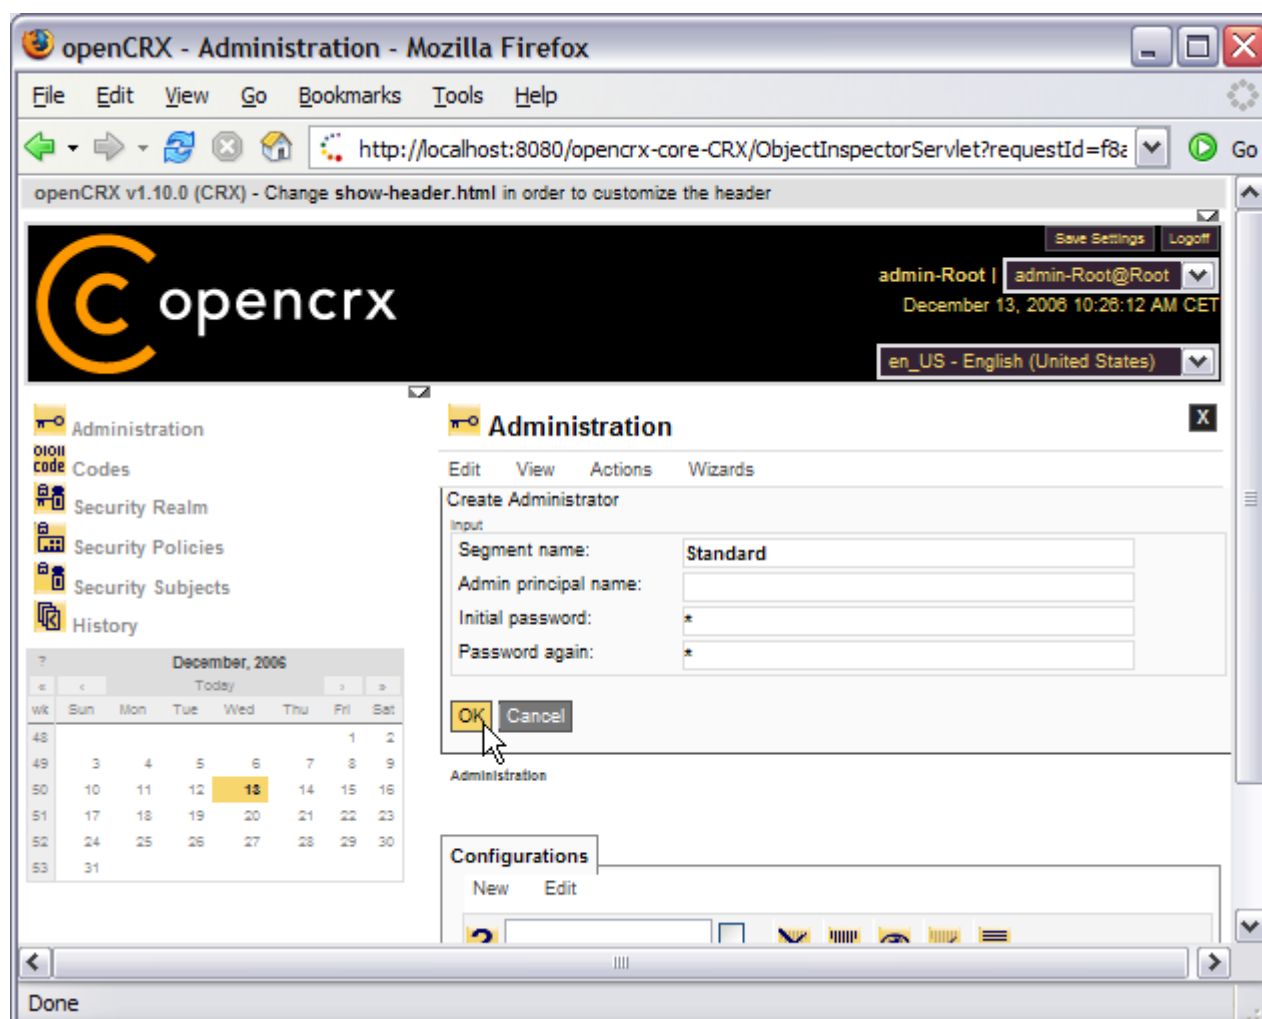


Figure 4: Create a new segment named Standard



Please verify the spelling of the segment name: **Standard** (with a capital "S").

Next you click **OK** to execute the operation **Create Administrator** which creates the segment named **Standard**. The result of executing this operation should look as follows:

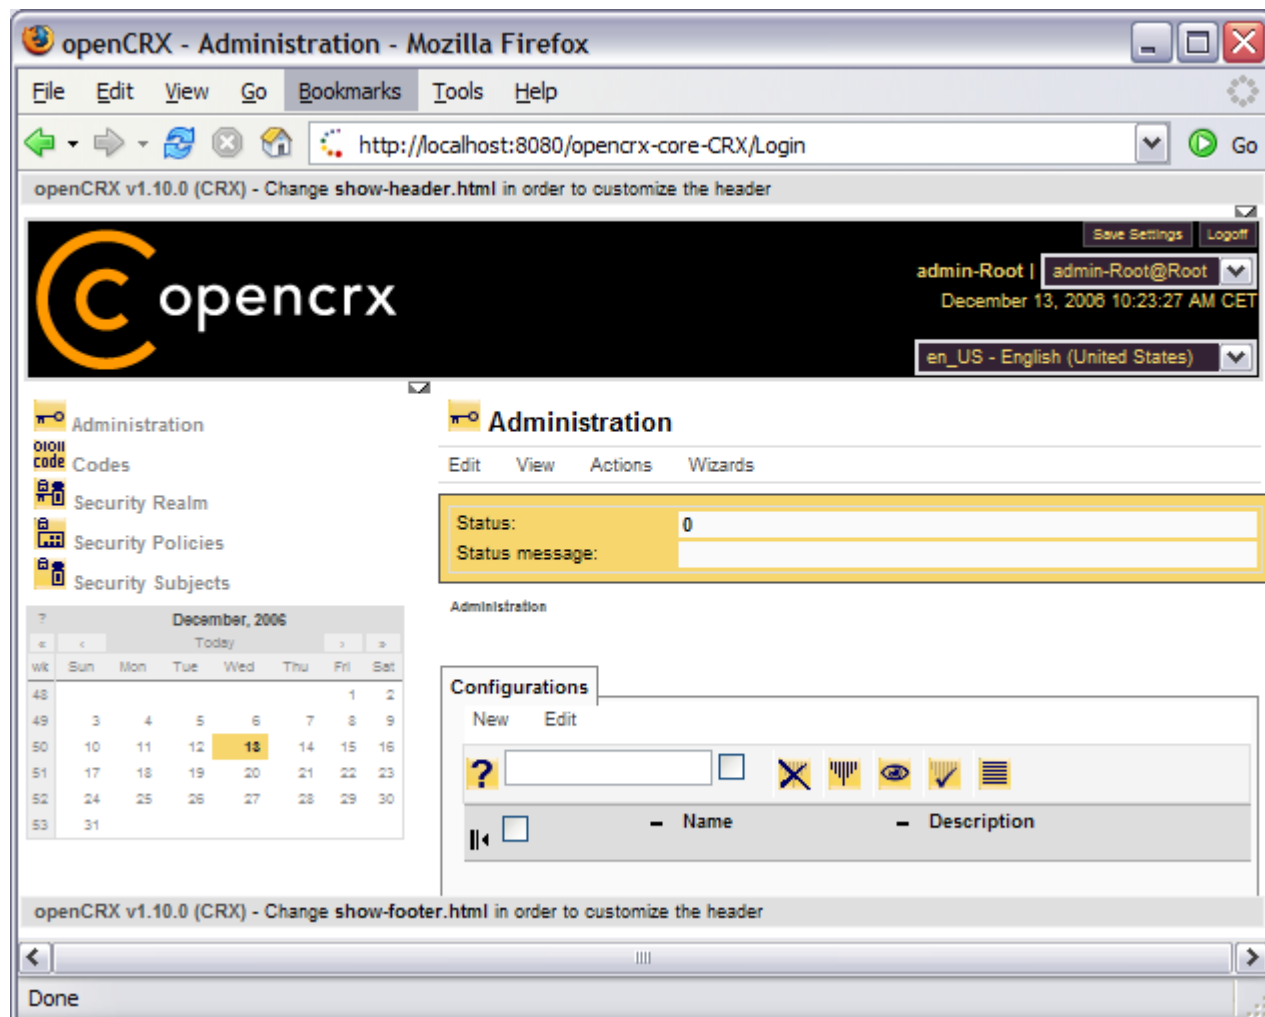


Figure 5: Result of operation Create Administrator

### 3.3.3 Import Codes and Data

openCRX is distributed with many code tables and several data files (e.g. unit of measurement information, standard activity management process). Code tables and data files must be imported from the provided XML files to make them available to openCRX.

Execute the operation **View > Reload** and then click **Yes** to start the import:

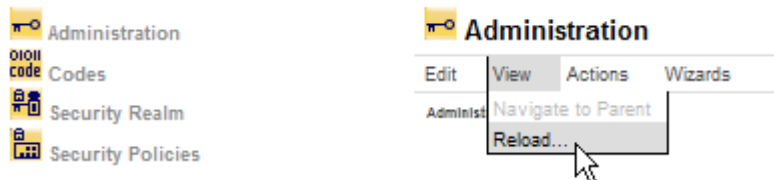


Figure 6: Load Code Tables and Data – Step 1

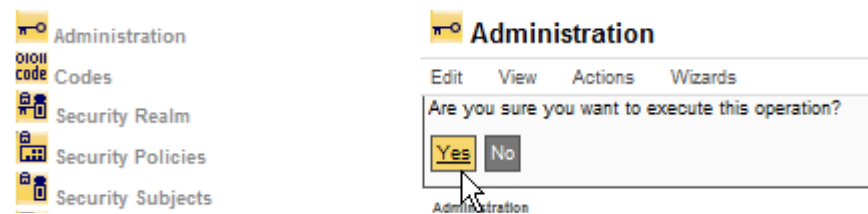


Figure 7: Load Code Tables and Data – Step 2

Please note that this operation takes some time to complete as thousands of objects are made persistent in your database during the import. The console output will look similar to the following listing:

Listing 5: Console Output – Importing Codes and Data

```

...
10:31:59,894 INFO [STDOUT] Loading codes
10:31:59,894 INFO [STDOUT] Loading /WEB-INF/config/code/Root/en_US/accesslevel.xml
10:31:59,925 INFO [STDOUT] Loading /WEB-INF/config/code/Root/en_US/accountcategory.xml
10:31:59,925 INFO [STDOUT] Loading /WEB-INF/config/code/Root/en_US/accountrole.xml
...
10:32:00,300 INFO [STDOUT] Loading /WEB-INF/config/code/Root/de_CH/accesslevel.xml
10:32:00,316 INFO [STDOUT] Loading /WEB-INF/config/code/Root/de_CH/accountcategory.xml
10:32:00,316 INFO [STDOUT] Loading /WEB-INF/config/code/Root/de_CH/accountrole.xml
...
10:32:08,019 INFO [STDOUT] Loading /WEB-INF/config/code/Root/cs_CZ/usageaddress_ext_postal.xml
10:32:08,035 INFO [STDOUT] Loading /WEB-INF/config/code/Root/cs_CZ/usageaddress_ext_room.xml
10:32:08,035 INFO [STDOUT] Loading /WEB-INF/config/code/Root/cs_CZ/usageaddress_ext_web.xml
10:32:08,051 INFO [STDOUT] Loading /WEB-INF/config/code/Root/cs_CZ/usageproductbaseprice.xml
10:32:08,051 INFO [STDOUT] Loading /WEB-INF/config/code/Root/cs_CZ/utcoffset.xml
10:32:08,051 INFO [STDOUT] Storing 1485 code entries
10:32:49,679 INFO [STDOUT] Done
10:32:50,413 INFO [STDOUT] Loading data
10:32:50,413 INFO [STDOUT] Loading /WEB-INF/config/data/Standard/bug-and-feature-process.xml
10:32:51,867 INFO [STDOUT] Storing 26 objects
10:32:52,773 INFO [STDOUT] Loading /WEB-INF/config/data/Standard/contracts.xml
10:32:54,429 INFO [STDOUT] Storing 1 objects
10:32:54,492 INFO [STDOUT] Loading /WEB-INF/config/data/Standard/products.xml
10:32:55,476 INFO [STDOUT] Storing 1 objects
10:32:55,554 INFO [STDOUT] Loading /WEB-INF/config/data/Root/uom_SI_and_Paper.xml
10:32:57,117 INFO [STDOUT] Storing 42 objects
10:32:57,914 INFO [STDOUT] Done
  
```

### 3.3.4 Set Access Levels of Codes

Navigate to the package Codes by clicking on the Root menu entry **Codes**. Then execute the operation **Security > Set Access Level** as shown below:

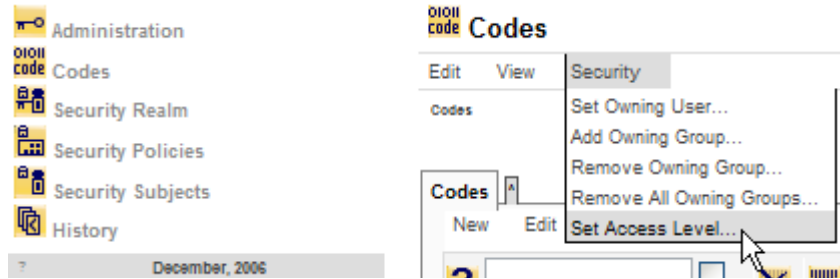


Figure 8: Execute Operation Set Access Level

Set the parameters as follows (see also figure below):

- Browse access level: **[4] global**
- Update access level: **[2] basic**
- Delete access level: **[2] basic**
- Mode: **[1] recursive**

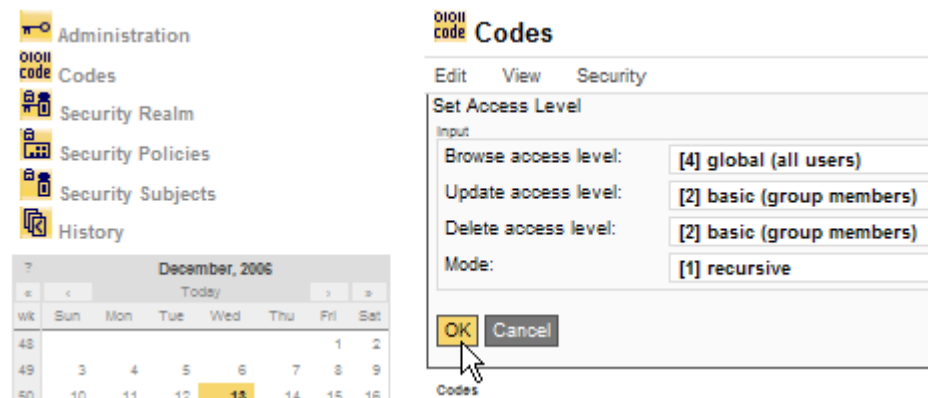


Figure 9: Parameters of Operation Set Access Level

Please note that this operation also takes a fair amount of time to complete:



Figure 10: Result of the Operation Set Access Level

### 3.3.5 Restarting the Application Server

Please restart the application server. On Windows you can stop JBoss by typing <CTRL>-C into the command window.



**After stopping JBoss and before restarting JBoss** it is strongly advised that you delete the **tmp** and **work** directories:

```
jboss-4.0.5.GA\server\default\tmp
```

```
jboss-4.0.5.GA\server\default\work
```

On Windows you can start JBoss by executing run.bat located in the directory `jboss-4.0.5.GA\bin`

## 3.4 Create a new User *guest*

Once your application server is up and running again and openCRX properly deployed, new users are created with the following steps:

1. as *admin-Root*: create a new **Subject**
2. as *admin-Root*: create a new **Principal** in realm **Default** and link this principal to the subject created in the previous step
3. as *admin-Root*: make **Principal** member of group **Users**
4. as *admin-Standard*: create a new **Contact**
5. as *admin-Standard*: create a new **User** and link this User to the contact created in the previous step

The following sections will guide you through the creation of a new User **guest** with permission to access the previously created segment **Standard**.

### 3.4.1 Create a new Subject *quest*

As **admin-Root**, navigate to the package **Security Subjects** and then create a new **Subject** with the creator menu **New > Subject** as shown below:

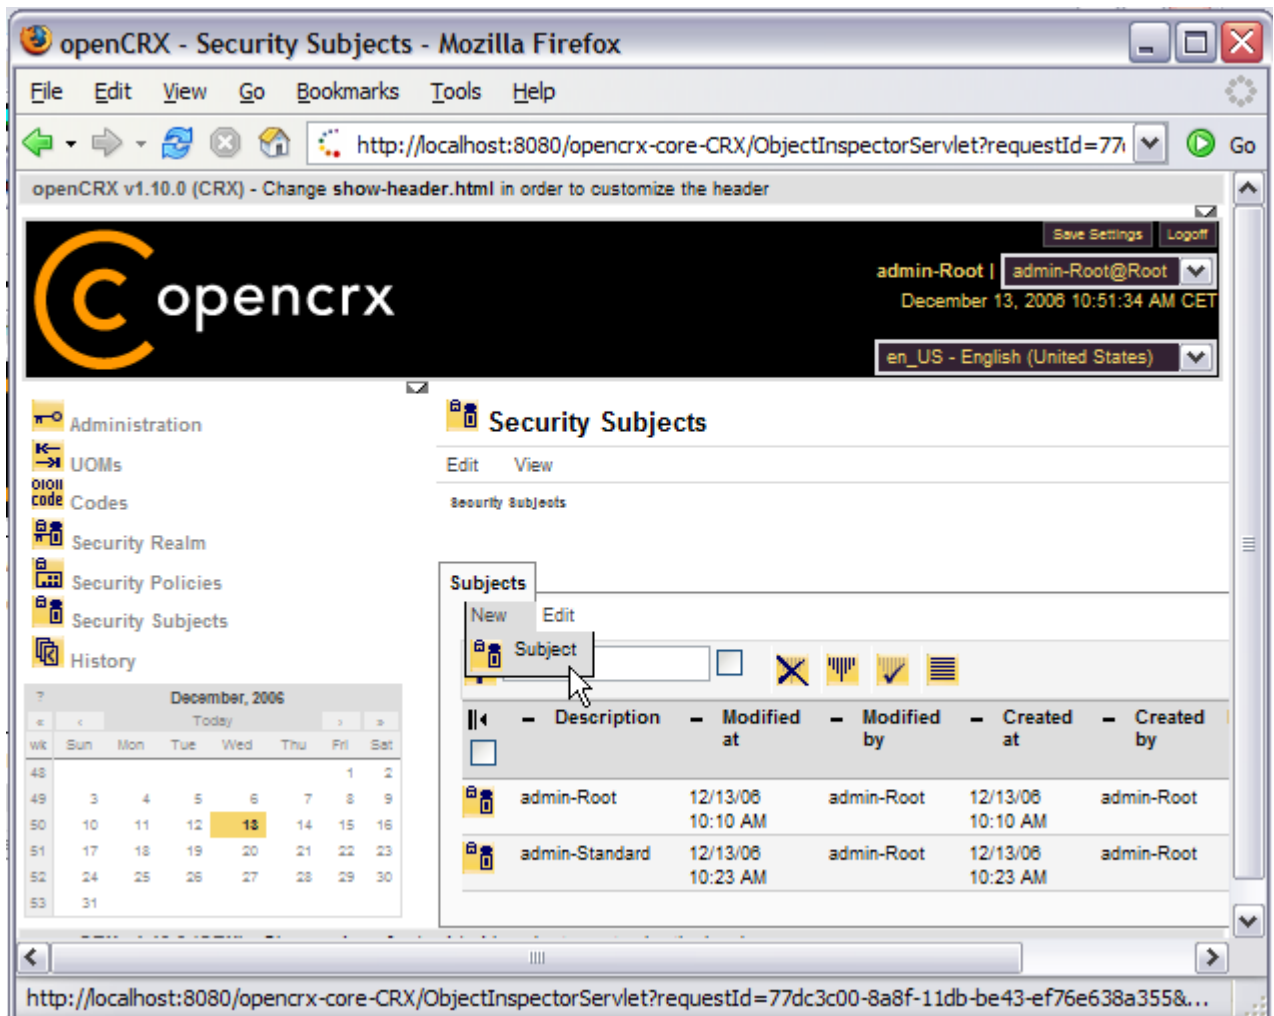


Figure 11: Create a new Subject

Enter **guest** into the field *Description*. More importantly, change the proposed *Qualifier* to **guest** as shown in the figure below:

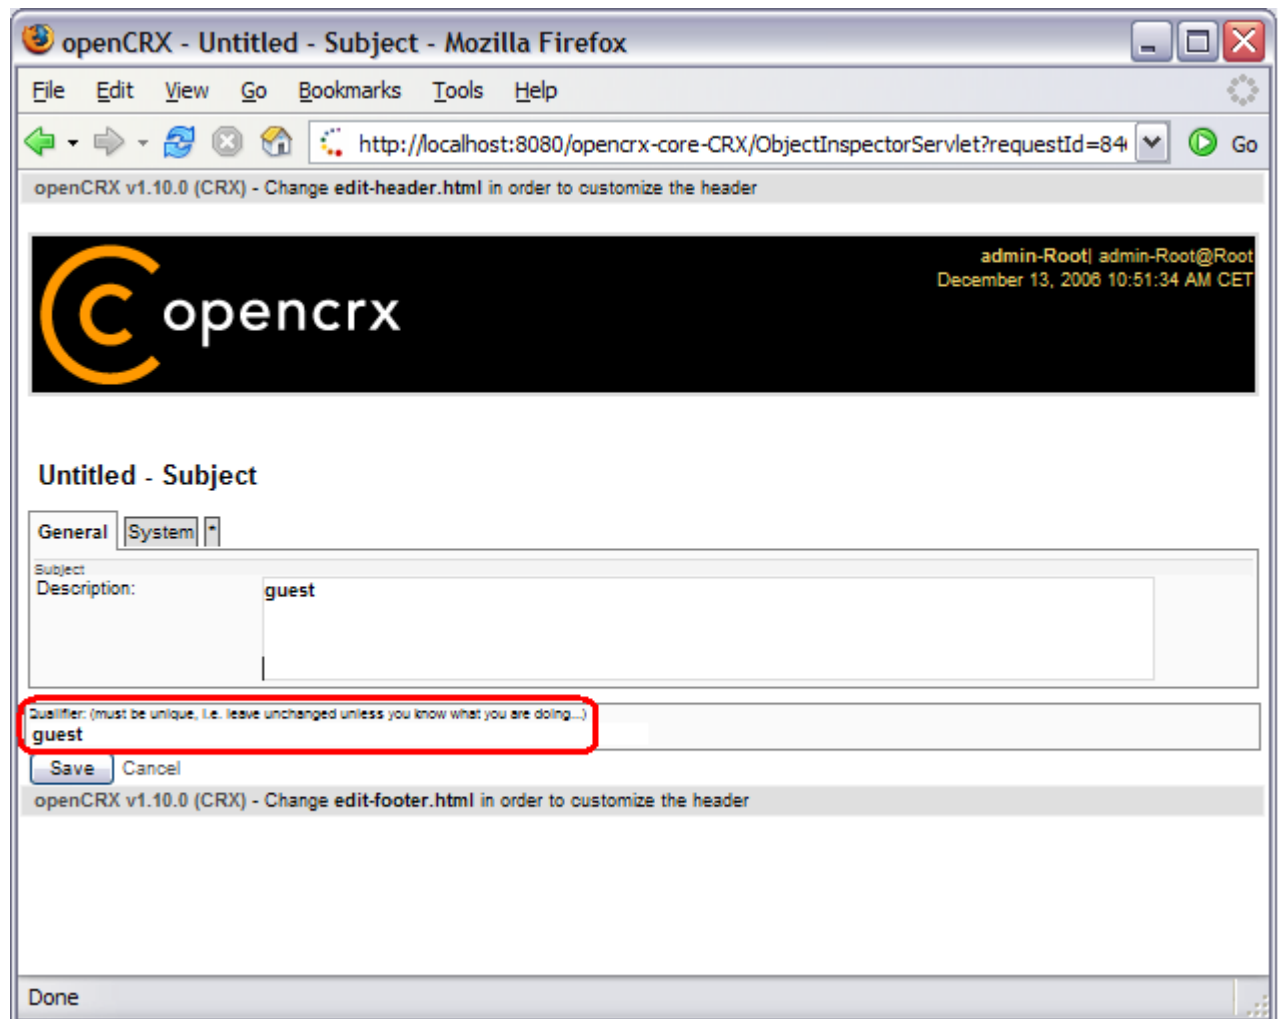


Figure 12: Change the Subject's Qualifier to guest



The Subject Qualifier represents the Subject's Login name.

Next you click **Save** to store this new Subject. You should now see 3 Subjects (including the newly created Subject guest) in the grid Subjects:

The screenshot shows the openCRX Security Subjects web interface. The browser window title is "openCRX - Security Subjects - Mozilla Firefox". The address bar shows the URL: `http://localhost:8080/openCRX-core-CRX/ObjectInspectorServlet?requestId=84`. The page header includes the openCRX logo and the text "openCRX v1.10.0 (CRX) - Change show-header.html in order to customize the header". The user is logged in as "admin-Root" with the email "admin-Root@Root" and the date "December 13, 2006 10:54:34 AM CET". The language is set to "en\_US - English (United States)".

The main content area is titled "Security Subjects" and has "Edit" and "View" buttons. Below this, there is a "Subject:" field with the value "guest [Edit]".

The "Subjects" tab is active, showing a table with the following data:

Description	Modified at	Modified by	Created at	Created by	Iden
admin-Root	12/13/06 10:10 AM	admin-Root	12/13/06 10:10 AM	admin-Root	adm
admin-Standard	12/13/06 10:23 AM	admin-Root	12/13/06 10:23 AM	admin-Root	adm
guest	12/13/06 10:54 AM	admin-Root	12/13/06 10:54 AM	admin-Root	gues

The footer of the page includes the text "openCRX v1.10.0 (CRX) - Change show-footer.html in order to customize the header" and a "Done" button.

Figure 13: Grid Subjects with admin-Root, admin-Standard, and guest

### 3.4.2 Create a new Principal *guest* in realm **Default**

Next, you need to create a new **Principal** in realm **Default**.



Please make sure that you create the new Principal in realm **Default** and not in some other realm – follow instructions meticulously!

Click on the package **Security Realm** in the root menu and then navigate to the realm **Default**. You can do this – for example – by clicking on the bread crum entry *Security Realms* as shown in the figure below:

The screenshot shows the openCRX web interface in Mozilla Firefox. The browser title is "openCRX - Root - Security Realm - Mozilla Firefox". The address bar shows the URL: "http://localhost:8080/opencrx-core-CRX/ObjectInspectorServlet?requestId=eff...". The page content includes a navigation menu on the left with items like Administration, UOMs, Codes, Security Realm, Security Policies, Security Subjects, and History. The main content area is titled "Root - Security Realm" and contains a breadcrumb trail: "Security Realms > Root". A red box highlights this breadcrumb trail. Below the breadcrumb trail, there are tabs for "General" and "System". The "General" tab is active, showing fields for "Name" (Root) and "Description" (Root realm). Below this, there is a "Principals" section with a table listing existing principals.

Name	Subject	Last login at	Disabled	Descr
Administrators			<input type="checkbox"/>	Administra
admin-Root	admin-Root	12/13/06 10:51 AM	<input type="checkbox"/>	Root\adm
admin-Root.User	admin-Root		<input type="checkbox"/>	Root\adm
admin-Standard	admin-Standard		<input type="checkbox"/>	Root\adm

Figure 14: Click on bread crum entry *Security Realms*

Next you click on the icon of the Realm **Default**. Your screen should now look as follows:



Figure 15: Realm Default

Select the creator menu **New > Principal** as shown as shown below:

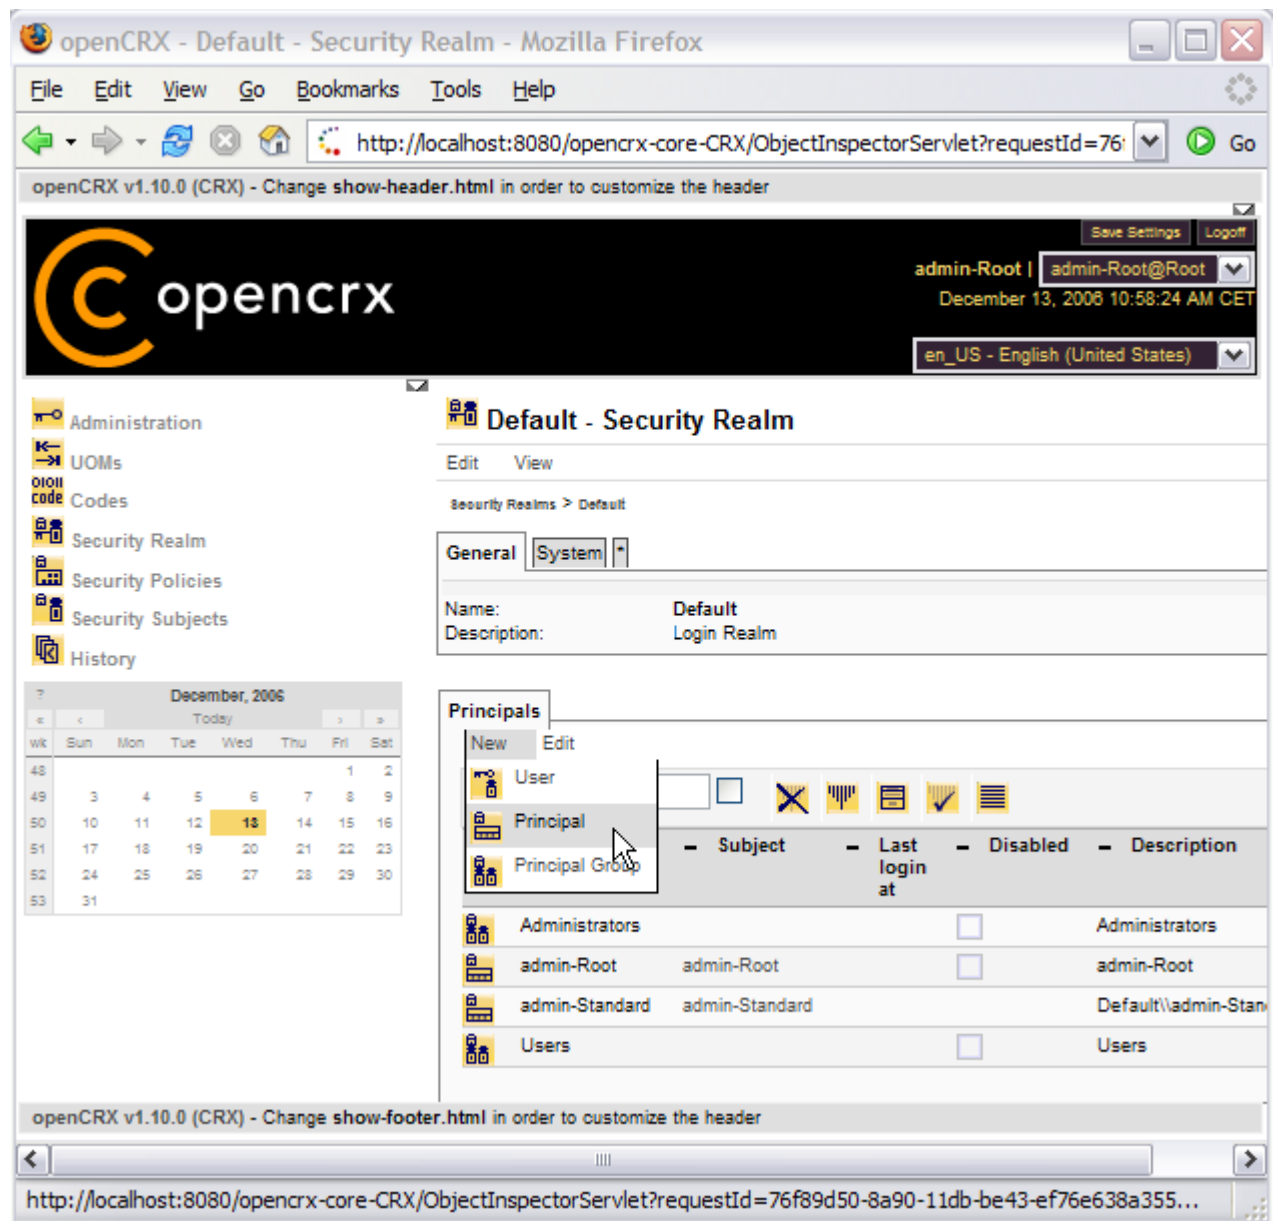


Figure 16: Create a new Principal

You need to link this Principal with the previously created Subject. Type **guest** into the field Subject and then select **guest [guest]** from the autocompleter's drop down menu as shown below:

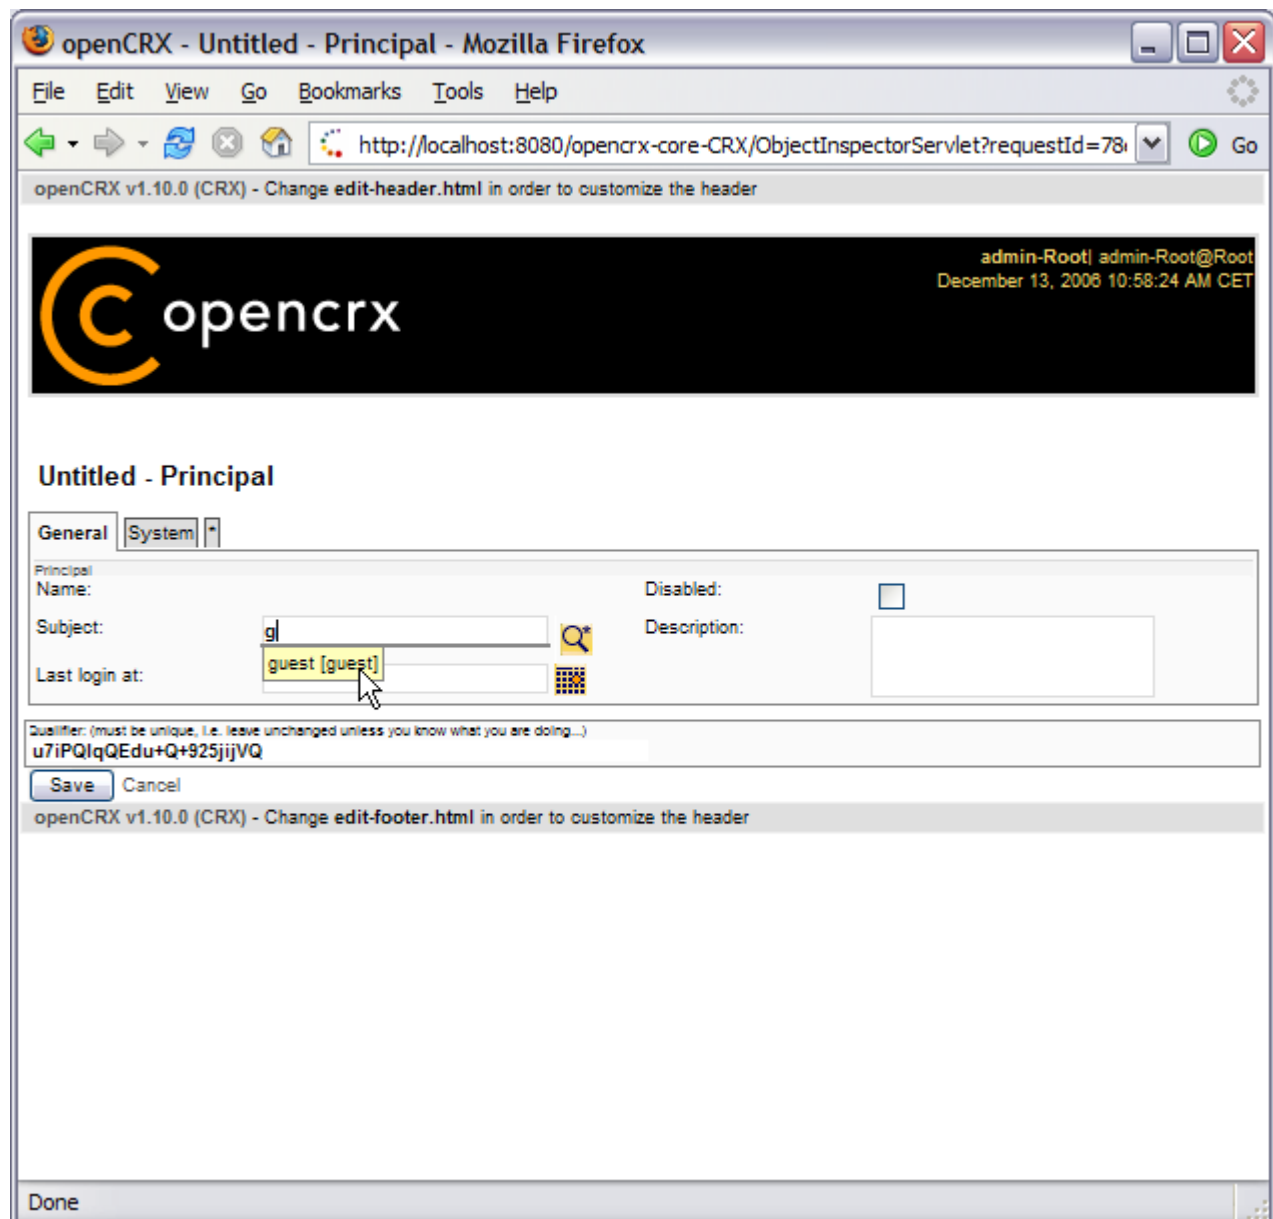


Figure 17: Select Subject guest from the drop down menu



Please note that just typing the word guest into the Subject field is not sufficient. You **must select the appropriate Subject from the drop down menu** that contains all Subjects that match the string you typed into the Subject field (depending on the speed of your server you will see the drop down menu before you have finished typing – that is OK, just select the appropriate Subject from the drop down menu)

Next you enter the Principal name (which will be the user/login id) of the Principal into the field Qualifier (e.g. **guest** as shown in the figure below):

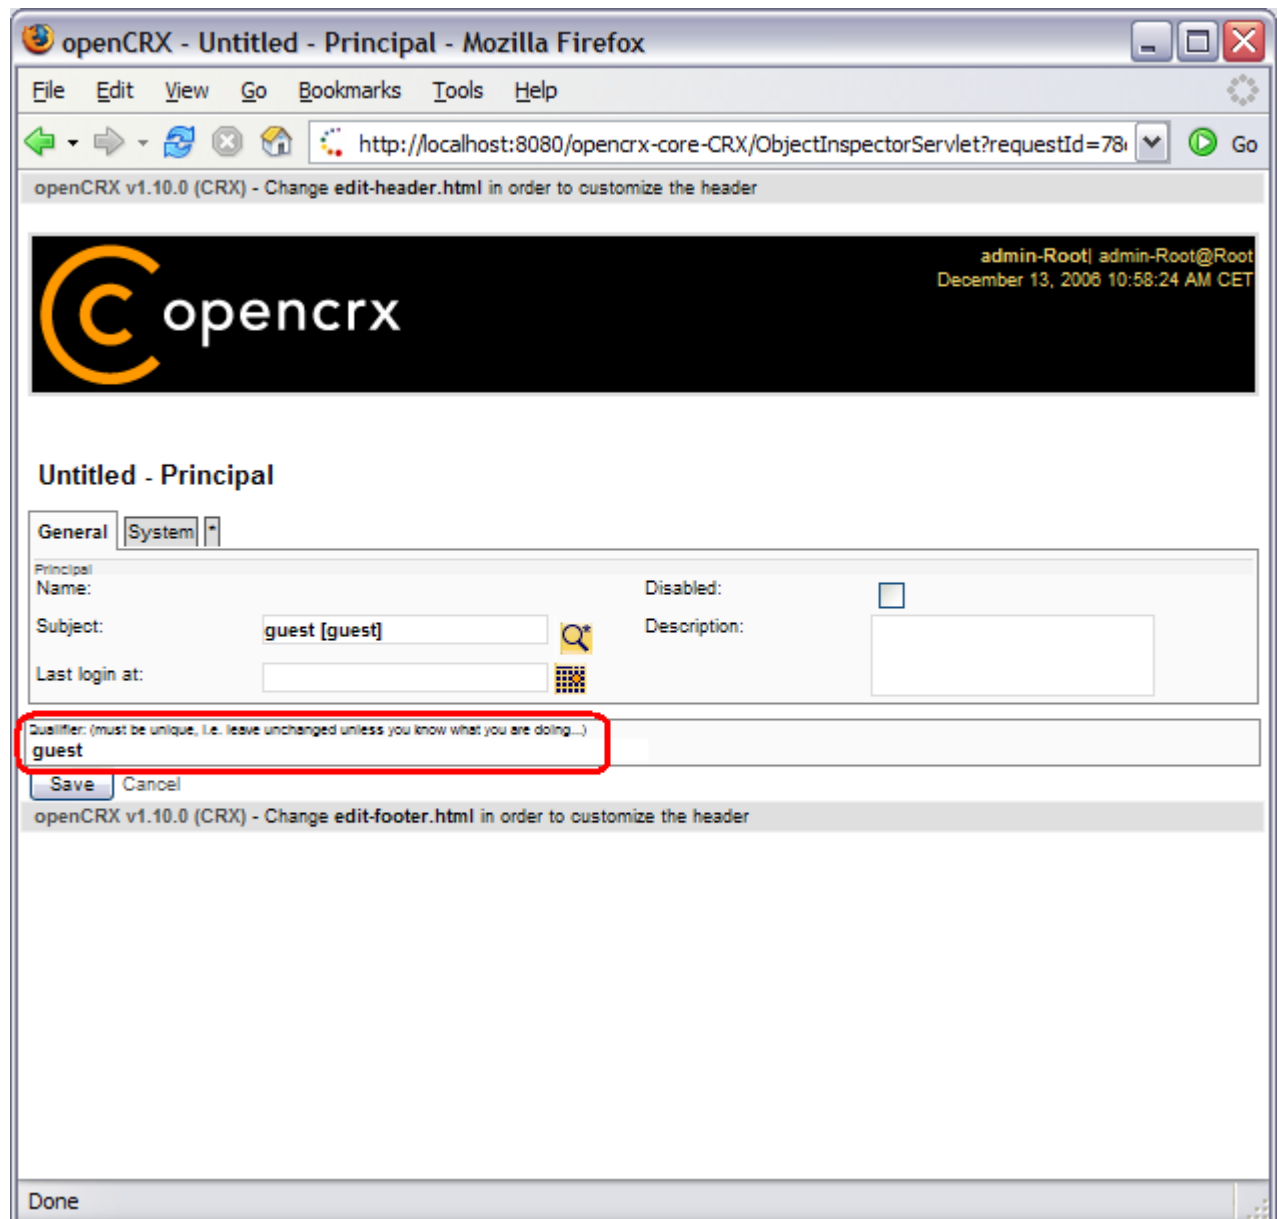


Figure 18: Change the Principal's Qualifier to guest

Next you click **Save** to store this new Principal. In the grid Principals you should now see 2 Principal Groups (Administrators, Users) and 3 Principals (admin-Root, admin-Standard, and the newly created Principal guest):

The screenshot shows the openCRX web interface in Mozilla Firefox. The browser address bar shows the URL: `http://localhost:8080/openCRX-core-CRX/ObjectInspectorServlet?requestId=78`. The page title is "openCRX v1.10.0 (CRX) - Change show-header.html in order to customize the header".

The main content area is titled "Default - Security Realm" and includes a navigation menu on the left with items: Administration, UOMs, Codes, Security Realm, Security Policies, Security Subjects, and History. A calendar for December 2006 is also visible.

The "Principals" section is active, showing a table of principals:

Name	Subject	Last login at	Disabled	Description
Administrators			<input type="checkbox"/>	Administrators
admin-Root	admin-Root		<input type="checkbox"/>	admin-Root
admin-Standard	admin-Standard		<input type="checkbox"/>	Default\admin-Stan
guest	guest		<input type="checkbox"/>	
Users			<input type="checkbox"/>	Users

Figure 19: Grid Principals with newly created Principal guest

### 3.4.3 Make new Principal *guest* member of group **Users**

Next you must add the newly created Principal *guest* to the appropriate **Principal Group**. Navigate to the newly created principal (i.e. load it into the inspector by clicking on its icon).

Start typing **Users** into the input box of the grid **Member of Principal Groups** as shown below:

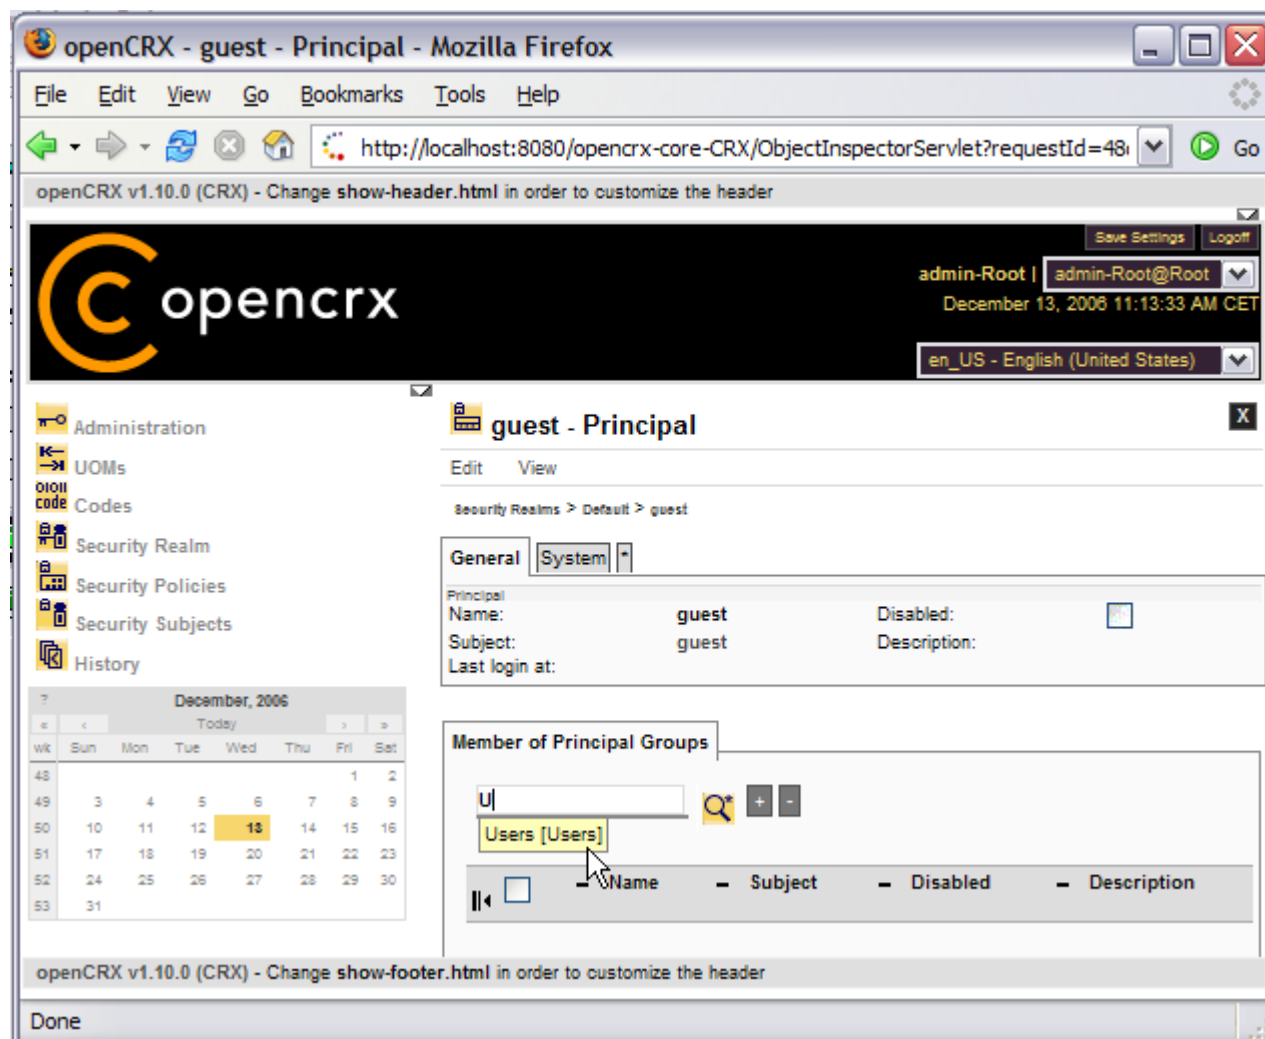


Figure 20: Add Principal *guest* to Principal Group **Users** – Step 1

As soon as the drop down menu of the autocompleter appears, select the entry **Users [Users]**.



Please note that just typing the word **Users** is not sufficient. You **must select the appropriate Principal Group from the drop down menu** of the autocompleter.



Normal users should be added to the principal group **Users**, segment administrators should be added to the principal group **Administrators**).

Consult the **openCRX Admin Guide** for additional/more detailed information on principals and principal groups.

To actually add the Principal Group Users you still need to click button [+ ] as shown below:

The screenshot shows the openCRX web interface in Mozilla Firefox. The browser address bar shows the URL: `http://localhost:8080/opencrx-core-CRX/ObjectInspectorServlet?requestId=48`. The page title is "openCRX v1.10.0 (CRX) - Change show-header.html in order to customize the header". The main content area displays the configuration for the "guest - Principal". Under the "Member of Principal Groups" section, the "Users [Users]" group is selected. A mouse cursor is clicking the "+" button next to the group name. Below this, there is a table with columns for "Name", "Subject", "Disabled", and "Description".

Figure 21: Add Principal guest to Principal Group Users – Step 2



You cannot just type **Users** into the input box – you must use the Lookup Inspector to select the appropriate Principal Group before clicking the button [+].

Finally, this principal group should show up in the Grid **Member of Principal Groups** as shown below:

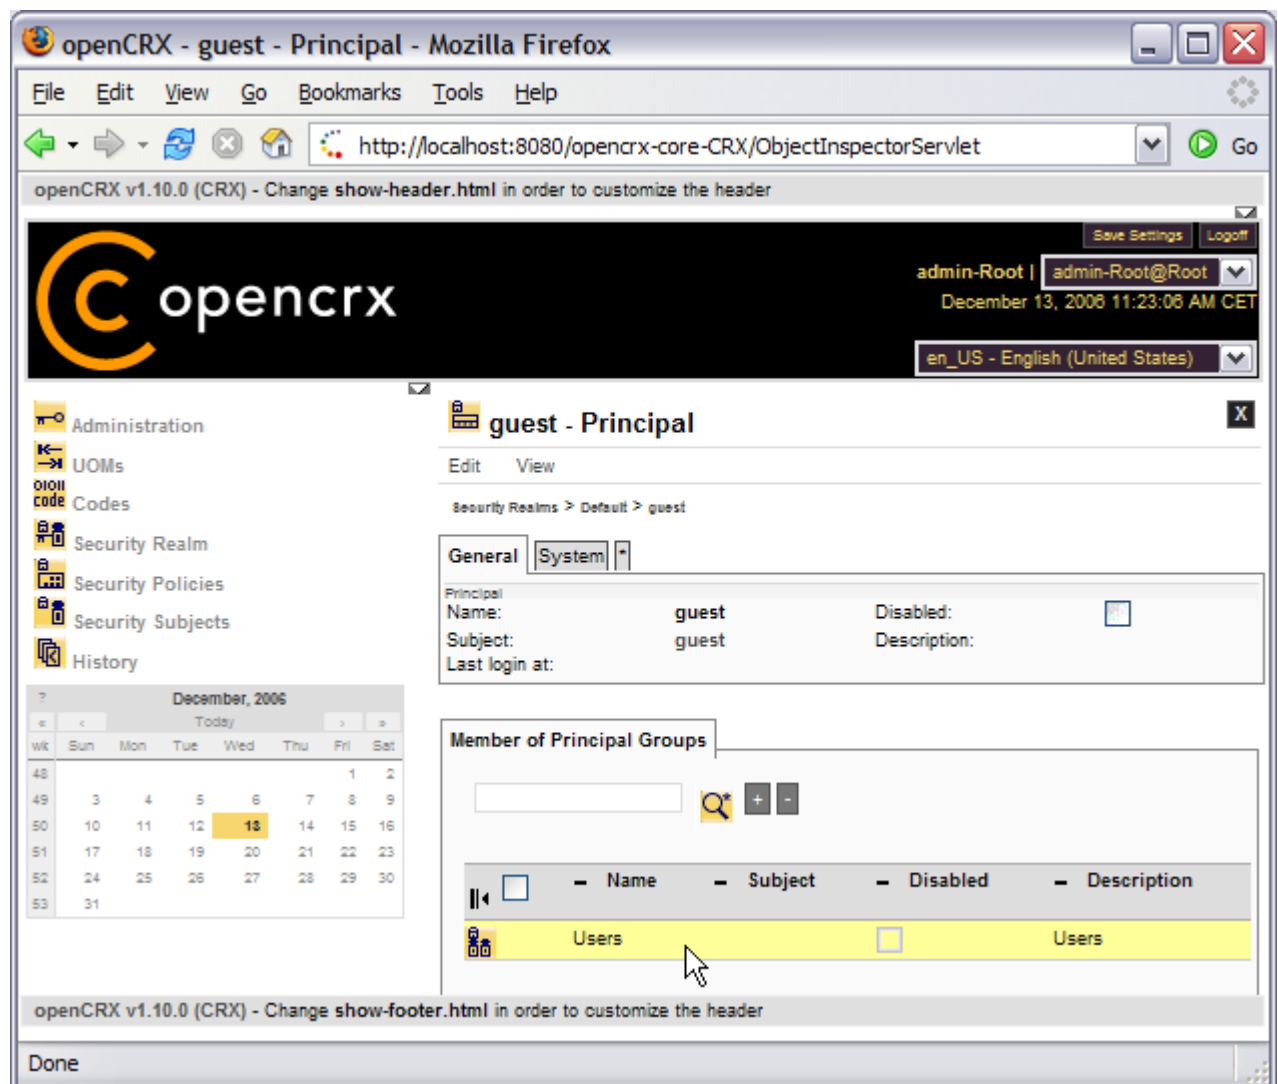


Figure 22: Add Principal guest to Principal Group Users – Step 3

That's it for admin-Root. You can now log out by clicking on **Logoff**.

### 3.4.4 Segment Administrator creates new Contact

Enter **admin-Standard** into the field *Username* and then enter **adminSecret** into the field *Password* (you may have chosen a different password, i.e. enter the password you chose during installation/configuration of the application server):

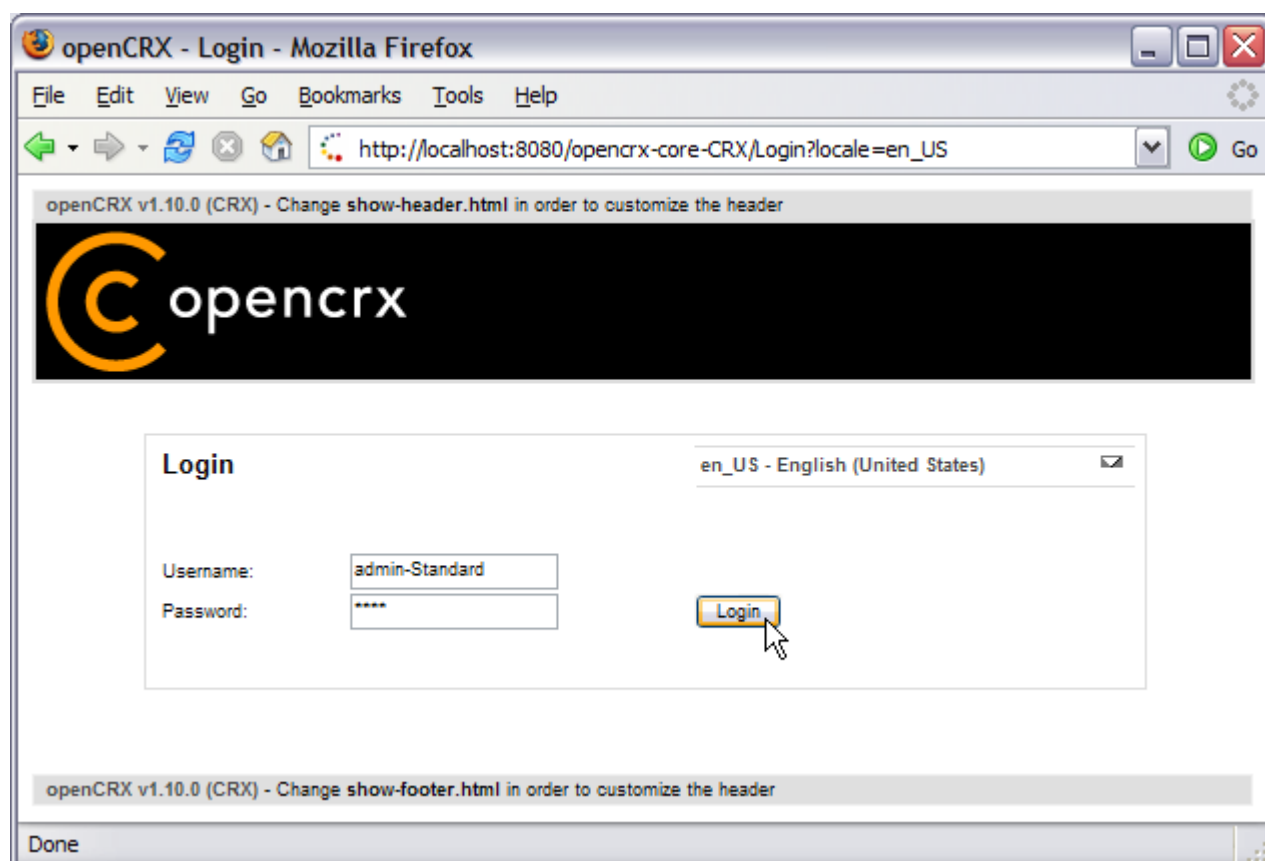


Figure 23: First login with admin-Standard / adminSecret

Click the button  to start the login process.



If you can't get past the login screen (with the correct Username and Password, of course) and the Warning "Browser must accept cookies" keeps showing up need to **verify your browser settings related to cookies**. If you have installed a **personal firewall** (e.g. ZoneAlarm) you also need to verify those cookie settings. **The application server must be able to create/set a session cookie.**



Please note that no charts are displayed when a users logs in for the first time. Activate charts by executing the operation **View > Recalculate and Refresh** as shown below:

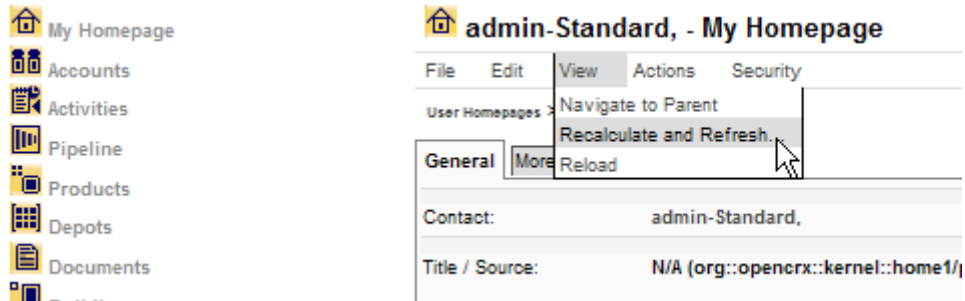


Figure 24: View > Recalculate and Refresh activates/updates charts

Click OK to actually execute the operation.

As administrator you first have to create a new **Contact** in the package **Accounts** for the new user **guest**. To do so, click on the package **Accounts** in the root menu and then select the creator menu **New > Contact** as shown in the figure below:


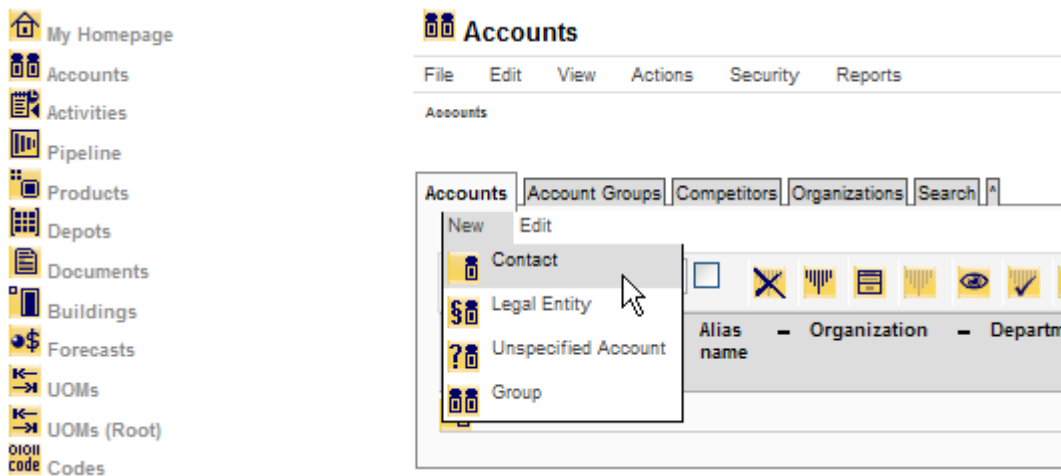


Figure 25: Create new Contact – Step 1

This brings up the form for new contacts. Enter **guest** into the field *Last name* (feel free to provide additional information, but don't change the Qualifier, which is generated automatically by openCRX, unless you know exactly what you are doing):

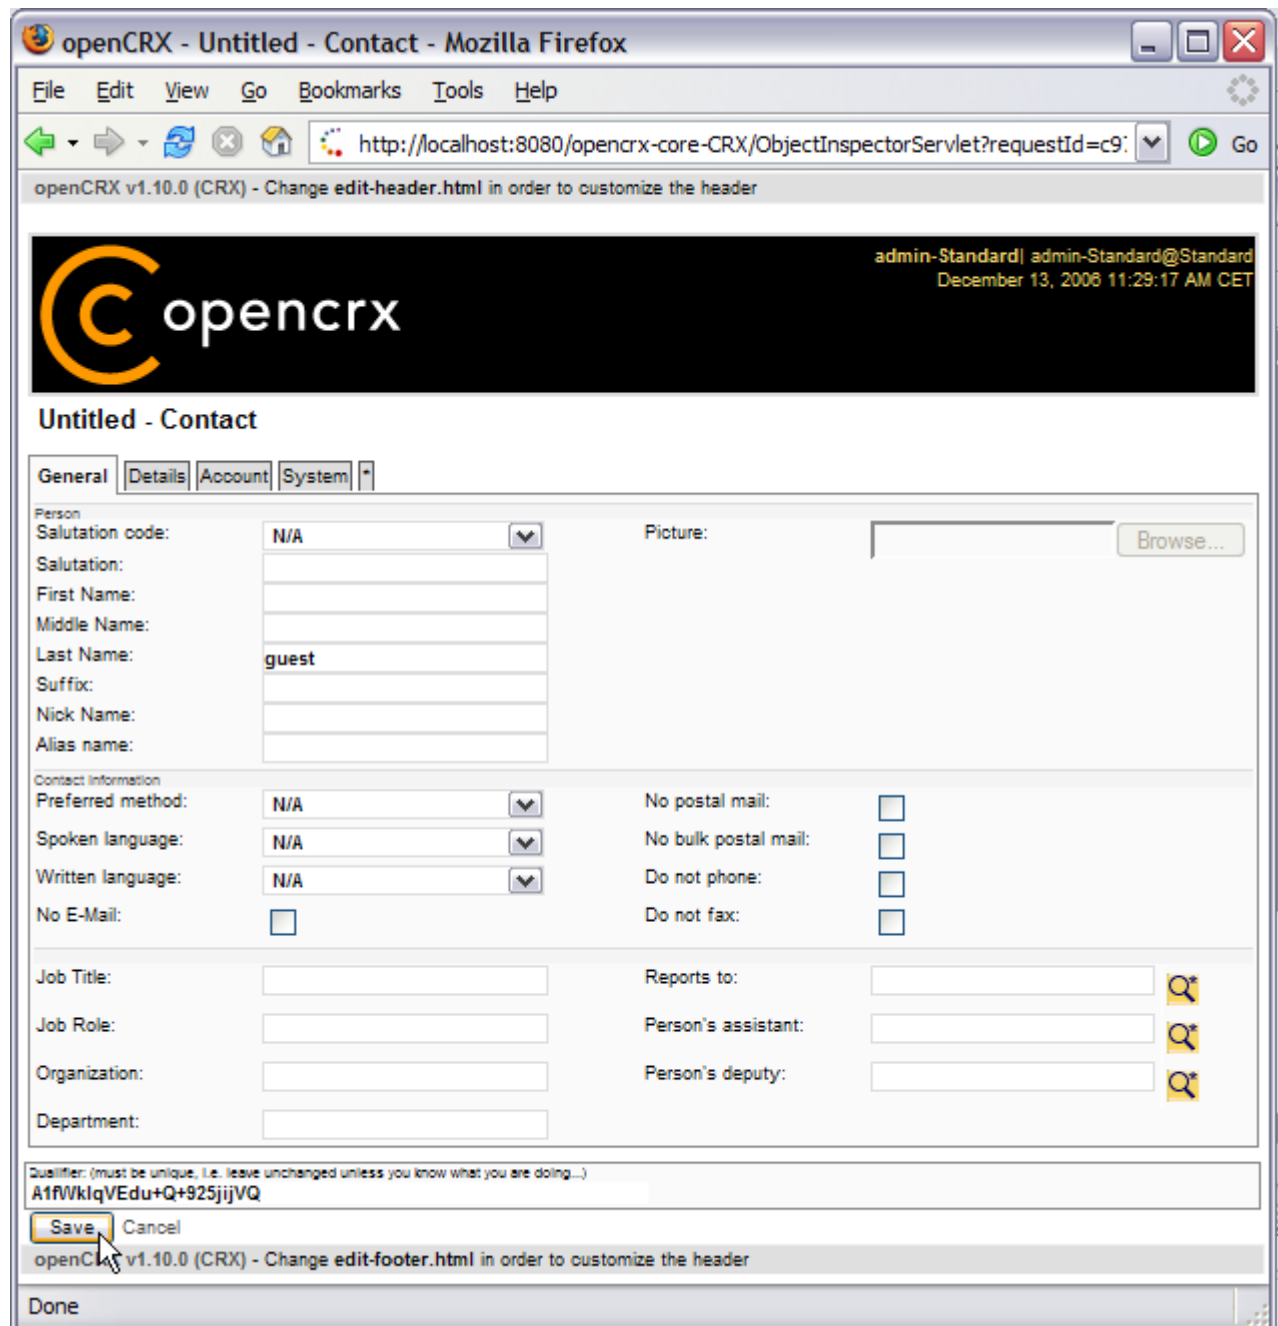

The screenshot shows a Mozilla Firefox browser window titled "openCRX - Untitled - Contact". The address bar shows the URL "http://localhost:8080/openCRX-core-CRX/ObjectInspectorServlet?requestId=c9:". The page header includes the openCRX logo and the text "admin-Standard | admin-Standard@Standard" and "December 13, 2008 11:29:17 AM CET". The main content area is titled "Untitled - Contact" and contains a form with several sections:

- Person**: Salutation code (N/A), Picture (Browse...), Salutation, First Name, Middle Name, Last Name (guest), Suffix, Nick Name, Alias name.
- Contact Information**: Preferred method (N/A), Spoken language (N/A), Written language (N/A), No E-Mail, No postal mail, No bulk postal mail, Do not phone, Do not fax.
- Job Information**: Job Title, Job Role, Organization, Department, Reports to, Person's assistant, Person's deputy.

At the bottom of the form, there is a "Qualifier" field with the value "A1fVWklqVEdu+Q+925jjjVQ" and a "Save" button highlighted in orange. The footer of the page contains the text "openCRX v1.10.0 (CRX) - Change edit-footer.html in order to customize the header" and "Done".

Figure 26: Create new Contact – Step 2

Next you click **Save** to store this new Contact. This takes you back to the **Account** grid.

### 3.4.5 Segment Administrator creates new User

Click **User Homepages** and select the operation **Actions > Create User...** which allows you to create and initialize a new user. Set the fields to the values as shown below – type **guest** into the field *Principal name*, use the Lookup Inspector or the autocompleter to fetch values for *Contact* and *Primary user group* (note that you must either fetch values with the Lookup Inspector or select entries from the autocompleter's drop down menu for the parameters *Contact* and *Primary user group*, i.e. it is not sufficient to just type some text into these fields), and then type a password (e.g. **guest**) into the fields *Initial password* and *Password again*:

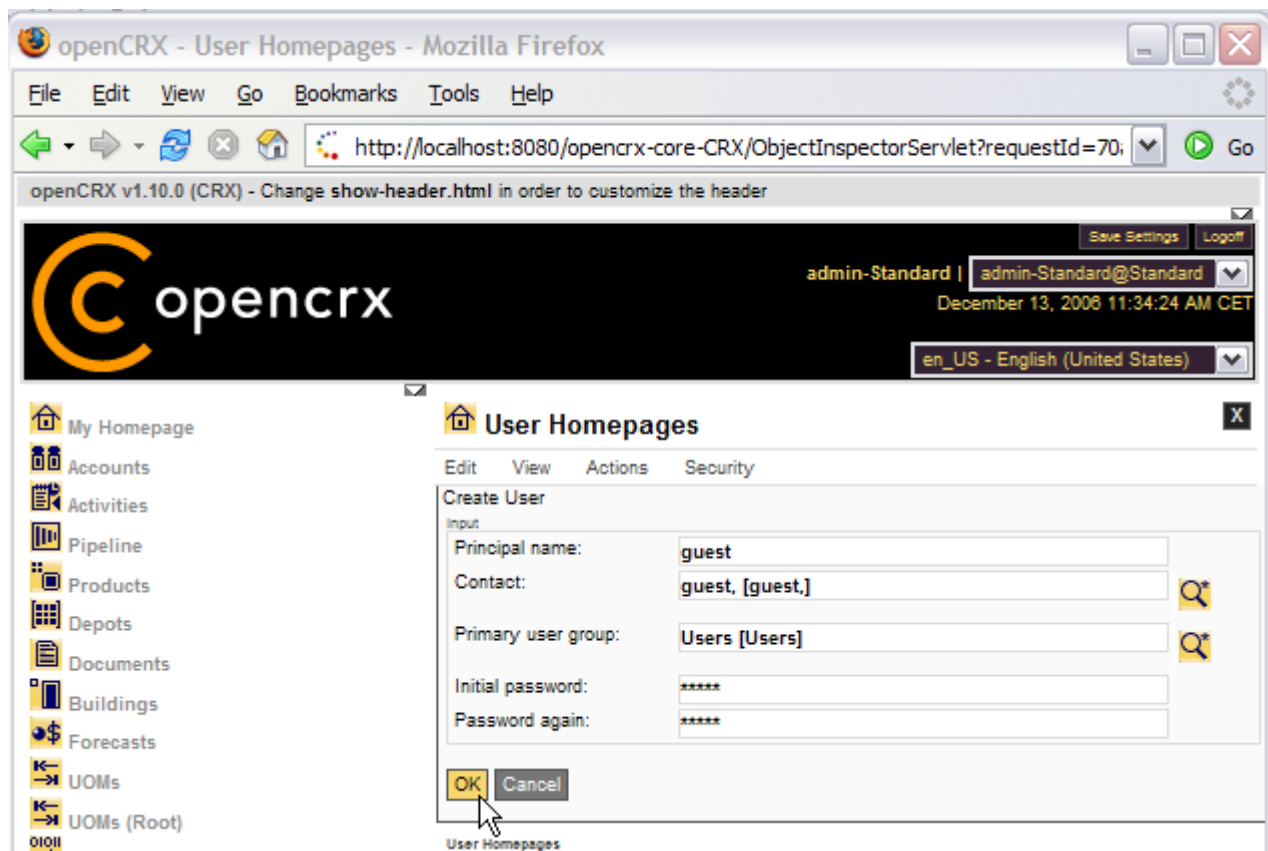


Figure 27: Create new User



Passwords are stored in the table **security\_Credential**. If you do not have the login module of your application server configured to access the table `security_Credential` then the setting of the passwords in openCRX has no effect (with JBoss, for example, you can edit the files **users.properties** and **roles.properties** to add users).

Next you click **OK** to execute the operation **Create User** which creates the User named **guest**. The result of executing this operation should look as follows:

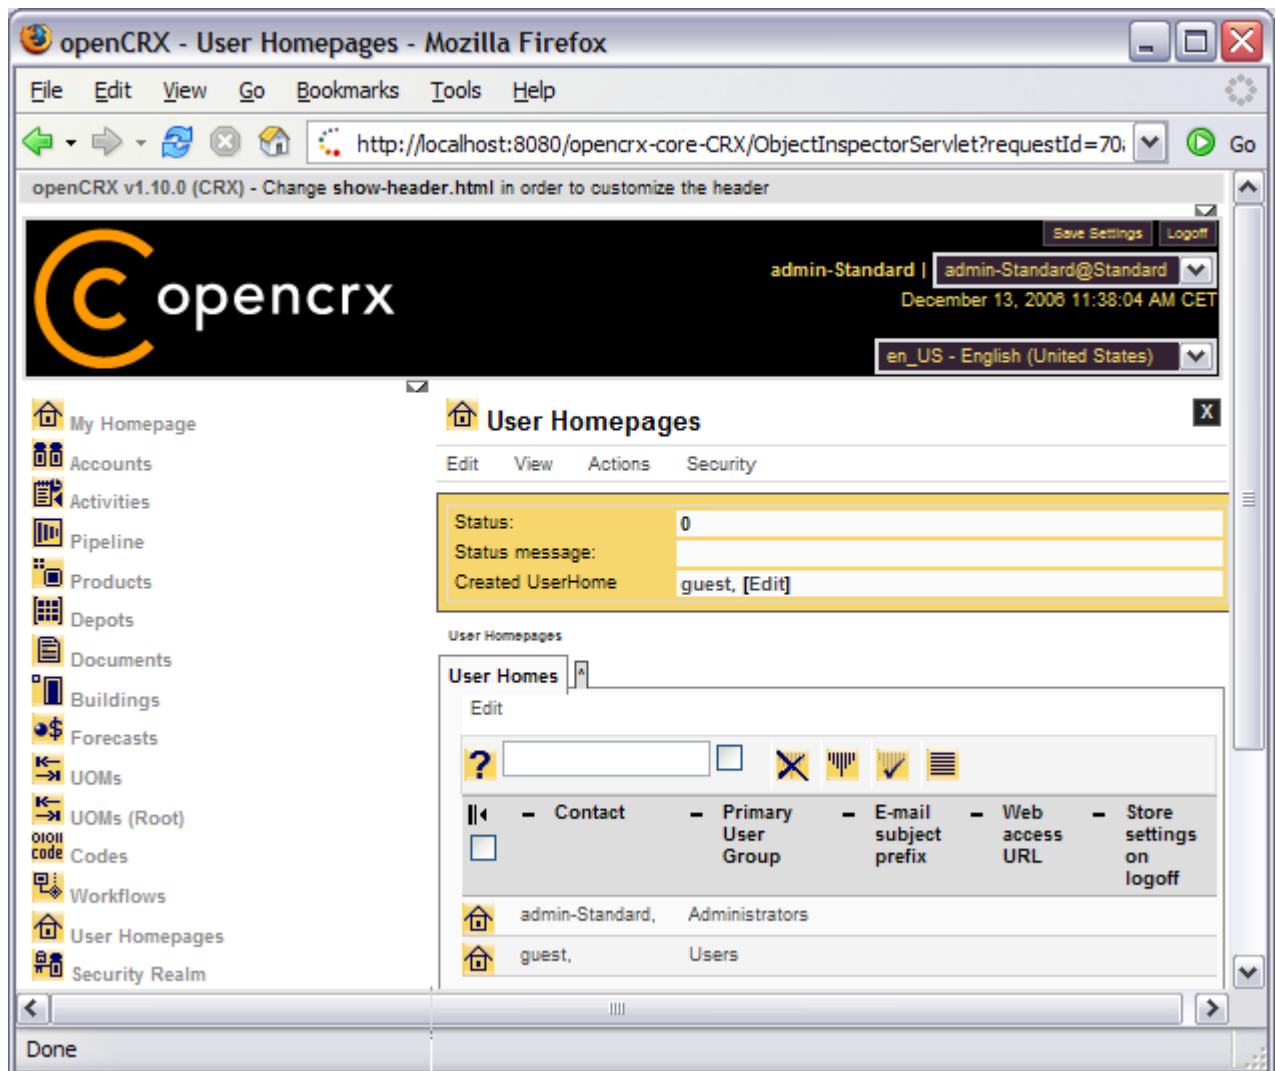


Figure 28: Result of operation Create User

The grid **User Homes** contains now 2 entries: admin-Standard and guest.

Congratulations! You have successfully created the new user guest. The new user should now be able to login. You can verify this by disconnecting and reconnecting with *Username* **guest** and *Password* **guest**.



You can usually fix corrupt data of an existing user by creating this user's homepage again – note, however, that the respective user's personal settings are reset to default values by executing the operation **Create User**.

## 4 Next Steps

Now that you have successfully installed and configured openCRX you might want to have a look at some of the additional documentation published at <http://www.opencrx.org/documents.htm>.